



ECONOMY BRASS GATE VALVES

- 200 PSI W.O.G. (Cold water, oil, gas)
- Cast brass construction
- Black cast hand wheel
- Non-rising stem
- Meets ANSI/NSF 61-8 approval

PART NO. NPT	UPC 777808+	LIST PRICE-A	PART NO. CXC	UPC 777808+	LIST PRICE-A	SIZE	PORT DIA. IN.	CTN/CASE QUANTITY
PEGV-202	335848	\$ 7.36			\$	1/4"	0.393	10/120
PEGV-203	335831	7.36				3/8"	0.452	10/120
PEGV-205	335824	7.10	PEGV-205C	335954	7.10	1/2"	0.499	10/120
PEGV-207	335855	9.77	PEGV-207C	335961	9.77	3/4"	0.748	10/80
PEGV-210	335862	14.57	PEGV-210C	336241	14.58	1"	0.984	5/60
PEGV-212	335879	20.62	PEGV-212C	336258	20.50	1 1/4"	1.220	5/40
PEGV-215	335930	26.18	PEGV-215C	336265	25.92	1 1/2"	1.496	5/30
PEGV-220	335947	38.70	PEGV-220C	336043	38.16	2"	1.889	2/20
PEGV-225	336050	74.28				2 1/2"	2.480	2/12
PEGV-230	336074	101.13				3"	2.834	1/8
PEGV-240	336081	161.09				4"	3.661	4



GATE VALVE - COMPRESSION

- With compression ring & nut
- 200 W.O.G. (Cold water, oil, gas)
- Non-rising stem
- Solid wedge disc
- Black cast hand wheel
- Meets ANSI/NSF 61-8 approval

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	PORT DIA. IN.	CTN/CASE QUANTITY
U0812CPR-05	232321	\$ 9.68	1/2"	0.508	10/120
U0812CPR-07	232338	13.32	3/4"	0.760	10/90
U0812CPR-10	232345	18.30	1"	0.960	5/60



FORGED BRASS FULL PORT BALL VALVES


- 1/4" thru 2" rated 600 W.O.G., 2 1/2" thru 4" rated 400 W.O.G.
- 150 PSI saturated steam
- Teflon packing
- Blow-out proof stem
- Forged brass
- Chrome plated ball
- Yellow plastic sleeve

PART NO. FPT	UPC 777808+	LIST PRICE-A	PART NO. CXC	UPC 777808+	LIST PRICE-A	SIZE	PORT DIA. IN.	CTN/CASE QUANTITY
PEBV-602	268917	\$ 3.98			\$	1/4"	0.393	15/120
PEBV-603	268924	3.98				3/8"	0.393	15/120
PEBV-605*	268931	6.39	PEBV-605C	269020	5.55	1/2"	0.590	15/120
PEBV-607*	268948	9.75	PEBV-607C	269037	9.36	3/4"	0.787	10/60
PEBV-610*	268955	13.17	PEBV-610C	269044	13.00	1"	0.984	8/48
PEBV-612*	268962	22.30	PEBV-612C	269051	22.41	1 1/4"	1.259	4/24
PEBV-615*	268979	29.76	PEBV-615C	269068	30.79	1 1/2"	1.575	2/24
PEBV-620*	268986	41.30	PEBV-620C	269075	45.85	2"	1.969	2/12
PEBV-625	268993	88.75	PEBV-625C	269082	85.10	2 1/2"	2.559	2/6
PEBV-630	269006	126.91	PEBV-630C	269099	118.37	3"	2.952	2/4
PEBV-640	269013	208.26	PEBV-640C	269105	206.09	4"	3.937	2

*The following gas approvals apply to 1/2" - 2" threaded valves only.

- CSA approved

5G STANDARD 3.88 (USA)
 STANDARD CR91-002 (CAN)
 5PSIG RATED GAS VALVE

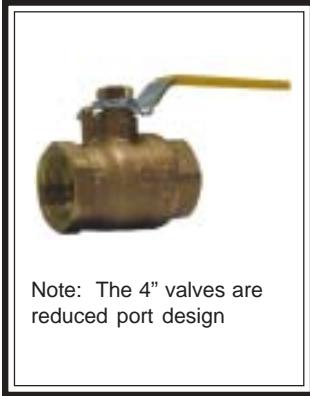

Note: The 4" valves are reduced port design

DELUXE FORGED BRASS FULL PORT BALL VALVES

- 600 PSI W.O.G. (Cold water, oil, gas)
- Blow-out proof stem
- Meets ANSI/NSF 61-8 approval
- Meets UL approval for 1/4" - 2" Threaded only
- Meets Factory Mutual Systems approval for 1/2" - 2" Threaded only
- 150 PSI Saturated Steam
- Yellow plastic sleeve

ANSI
AMERICAN NATIONAL
STANDARDS INSTITUTE

PART NO.	UPC	PART NO.	UPC	LIST PRICE-A	SIZE	PORT DIA. IN.	CTN/CASE QUANTITY
FPT	777808+	CxC	777808+				
U0822-02	221158			\$ 6.08	1/4"	0.393	10/180
U0822-03	221165			6.08	3/8"	0.393	10/180
U0822-05	221172	U0822C-05	221257	6.08	1/2"	0.499	10/120
U0822-07	221189	U0822C-07	221264	9.78	3/4"	0.787	10/90
U0822-10	221196	U0822C-10	221271	14.15	1"	0.984	6/60
U0822-12	221202	U0822C-12	221288	22.73	1 1/4"	1.259	4/36
U0822-15	221219	U0822C-15	221295	28.68	1 1/2"	1.496	4/24
U0822-20	221226	U0822C-20	221301	47.70	2"	1.968	2/12
U0822-25	221233	U0822C-25	252442	150.13	2 1/2"	2.480	8
U0822-30	221240	U0822C-30	252459	224.82	3"	2.952	2/6
U0822-40	252435			356.18	4"	2.952	1

NOTE: Option of Stainless Steel Handles Available

✦The following gas approvals apply to 1/2" - 2" threaded valves only.

- Meets CSA approval
- CAN 3.16** CAN / CGA - 3.16 STANDARD 125 PSIG RATING (CAN) FOR OUTDOOR USE
- BRS125G** 125 PSIG RATING (USA) ASME B16.33 STANDARD
- 5G** STANDARD 3.88 (USA) STANDARD CR91-002 (CAN) 5 PSIG RATED GAS VALVE
- 1/2PSI** ANSI Z21.15 (USA) CGA 9.1 (CAN) 1/2PSIG APPLIANCE VALVE



DELUXE FORGED BRASS FULL PORT BALL VALVE W/DRAIN

- 600 PSI W.O.G. (Cold water, oil, gas)
- Blue plastic sleeve
- Blow-out proof stem - Forged brass

PART NO.	UPC	LIST PRICE-A	PART NO.	UPC	LIST PRICE-A	SIZE	PORT DIA. IN	CTN/CASE QUANTITY
FPT	777808+		CxC	777808+				
PEBVD-605	221318	\$ 6.56	PEBVD-605C	221349	\$ 6.35	1/2"	0.499	15/120
PEBVD-607	221325	11.40	PEBVD-607C	221356	10.31	3/4"	0.787	10/60
PEBVD-610	221332	15.51	PEBVD-610C	221363	12.37	1"	0.984	8/48



STANDARD PORT CAST BRASS BALL VALVES

- 400 W.O.G.
- Chrome plated ball
- Teflon packing and seat
- Blow-out proof stem
- Cast brass body
- Blue handle

PART NO.	UPC	LIST PRICE-A	PART NO.	UPC	LIST PRICE-A	SIZE	PORT DIA. IN.	CTN/CASE QUANTITY
FPT	777808+		CXC	777808+				
U0829-02	268221	\$ 4.89			\$	1/4"	0.3144	6/240
U0829-03	268238	4.89				3/8"	0.3144	6/120
U0829-05	268245	4.89	U0829C-05	268337	4.48	1/2"	0.3930	6/120
U0829-07	268252	6.55	U0829C-07	268344	6.27	3/4"	0.5895	6/60
U0829-10	268269	11.58	U0829C-10	268351	11.50	1"	0.7467	6/60
U0829-12	268276	16.30	U0829C-12	268368	15.77	1 1/4"	0.9432	2/30
U0829-15	268283	23.85	U0829C-15	268375	23.32	1 1/2"	1.2576	2/30
U0829-20	268290	33.61	U0829C-20	268382	32.07	2"	1.4934	2/24



FORGED BRASS FULL PORT BALL VALVES

- 600 PSI W.O.G. (Cold water, oil, gas)
- Blue plastic sleeve
- Blow-out proof stem-forged brass

COMPRESSION x COMPRESSION c/w DRAIN

PART NO.	UPC	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PEBV-CP05	221370	\$ 7.92	1/2"	10/100
PEBV-CP07	221387	14.34	3/4"	10/60
PEBV-CP10	221394	18.24	1"	4/40

COMPRESSION - NO DRAIN

PART NO.	UPC	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PEBV-CP05ND	221400	\$ 7.87	1/2"	10/100
PEBV-CP07ND	221417	12.12	3/4"	10/60
PEBV-CP10ND	221424	18.19	1"	4/40



PEX X PEX STANDARD PORT

- 400 PSI W.O.G. (Cold water, oil, gas)
- Yellow plastic sleeve
- Meets ANSI/NSF 61-8 approval

PART NO.	UPC 777818+	LIST PRICE-A	SIZE	PORT DIA. INS.	CTN/CASE QUANTITY
PEBV-P03	316427	\$ 8.75	3/8"	0.3937	10/120
PEBV-P05	268634	5.77	1/2"	0.3937	10/120
PEBV-P07	268641	6.66	3/4"	0.5905	10/120
PEBV-P10	315956	19.42	1"	0.7874	6/54



PEX BALL VALVE WITH DRAIN

- 400 PSI W.O.G. (Cold water, oil, gas)
- Yellow plastic sleeve

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PEBV-P05WD	315963	\$ 8.87	1/2"	10/120
PEBV-P07WD	315970	11.97	3/4"	10/120



FORGED BRASS FULL PORT BALL VALVE WITH BARBED CONNECTIONS

- 600 PSI W.O.G. (Cold water, oil, gas)
- Blue plastic sleeve
- Blow out proof stem
- Fits polyethylene water pipe

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PEBV-B05	305650	\$ 7.07	1/2"	10/100
PEBV-B07	305667	12.82	3/4"	6/60
PEBV-B10	305674	19.32	1"	6/48
PEBV-B12	311934	30.93	1 1/4"	6/24



FORGED BRASS FULL PORT BALL VALVE - FEMALE X BARB

- 600 PSI W.O.G. (Cold water, oil, gas)
- Blue plastic sleeve
- Suitable for connection to tanks, pumps, etc.
- Eliminates need for a poly insert adapter when converting from NPT to insert for polyethylene pipe

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PEBV-FB05	337248	\$ 7.53	1/2" FPT x 1/2 Barb	10
PEBV-FB07	337255	11.69	3/4" FPT x 3/4 Barb	10
PEBV-FB10	337262	17.61	1" FPT x 1" Barb	6
PEBV-FB12	337279	28.32	1 1/4" FPT x 1 1/4" Barb	4



FULL PORT MINI BALL VALVES

- 600 W.O.G. (Cold water, oil, gas)
- Red cast "T" handle
- Teflon packing & ball seat
- Chrome plated ball
- Forged brass construction - Body

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
U0828-01	221516	\$ 3.22	1/8" FPT x 1/8" FPT	20/200
U0828-02	221523	3.22	1/4" FPT x 1/4" FPT	20/200
U0828-01M01F	268399	3.22	1/8" MPT x 1/8" FPT	10/120
U0828-01M02F*	268405	3.22	1/8" MPT x 1/4" FPT	10/120
U0828-02M02F	268412	3.22	1/4" MPT x 1/4" FPT	10/120



FLARE GAS BALL VALVES

- Yellow handle
- CSA approved
- Meets UL approval

1/2PSI

ANSI Z21.15 (USA)
CGA 9.1 (CAN)
1/2 PSIG APPLIANCE VALVE

ANSI

5G

STANDARD 3.88 (USA)
STANDARD CR91-002 (CAN)
5PSIG RATED GAS VALVE

AMERICAN NATIONAL
STANDARDS INSTITUTE

FPT X FLARE (Two piece body design - Forged Brass)

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	PORT DIA.IN.	CTN/CASE QUANTITY
PE-GVF86	214006	\$ 7.85	1/2" FPT x 3/8" FL	0.400	12/144
PE-GVF88	214013	8.04	1/2" FPT x 1/2" FL	0.400	12/144

MPT X FLARE (Two piece body design - Forged Brass)

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	PORT DIA.IN.	CTN/CASE QUANTITY
PE-GVMF86	269389	\$ 8.97	1/2" MPT x 3/8" FL	0.400	12/144
PE-GVMF88	269396	8.97	1/2" MPT x 1/2" FL	0.400	12/144

FLARE X FLARE (Forged Brass)

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PE-GVFF6	269426	\$ 4.13	3/8" FL x 3/8" FL	12/144
PE-GVFF8	269433	4.42	1/2" FL x 1/2" FL	12/144



GAS BALL VALVES (Forged Brass)

- FPT X FPT two piece body design
- Forged brass
- Yellow handle
- CSA approved
- Meets UL approval

ANSI

AMERICAN NATIONAL
STANDARDS INSTITUTE

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PE-GV6	214020	\$ 3.99	3/8"	12/144
PE-GV8	180110	4.32	1/2"	12/144
PE-GV12	180127	7.39	3/4"	12/144
PE-GV16	214037	13.80	1"	12/144

5G STANDARD 3.88 (USA)
STANDARD CR91-002 (CAN)
5 PSIG RATED GAS VALVE

1/2PSI ANSI Z21.15 (USA)
CGA 9.1 (CAN)
1/2 PSIG APPLIANCE VALVE



STOP/STOP & WASTE VALVES - O-RING SEALING DESIGN - CSA APPROVED

- With O-ring design, the seal is below the threads. The threads are never exposed to the water whereas packing style valves have the thread constantly submerged in water. O-ring design tends to have easier operation and longevity due to the fact that threads do not become corroded in aggressive water conditions.
- To prevent damage to O-rings, stem must be removed before soldering.
- Maximum operating temperature: 180°F(82°C)
- Pressure Rating up to 150 PSI
- CSA approved

BLUEHANDLE TRIANGULAR PART NO.	UPC 777808+	LIST PRICE-A	ZINC SILVER HANDLE PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
STOP C X C PESV-B05	307845	\$ 6.23	PESV-M05	307852	\$ 6.23	1/2"	10/100
STOP & WASTE PESW-B05C	307869	5.13	PESW-M05C	307876	6.49	1/2"	10/100



BRASS STOP/STOP & WASTE VALVES - CSA APPROVED

- Black cast hand wheel
- CSA approved
- Meets NSF 61-8 approval
- Maximum operating temperature: 180°F(82°C)
- Pressure Rating up to 150 PSI

STOP				
PART NO.	UPC	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
FNPT	777808+			
PESV-05	316960	\$ 5.47	1/2"	10/100
PESV-07	316984	6.18	3/4"	10/100
CXC				
PESV-05C	316977	4.84	1/2"	10/100
PESV-07C	316991	5.84	3/4"	10/100
STOP & WASTE				
PART NO.	UPC	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
NPT	777808+			
PESW-05	317208	\$ 5.64	1/2"	10/100
PESW-07	317011	6.35	3/4"	10/100
CxC				
PESW-05C	317073	5.01	1/2"	10/100
PESW-07C	317004	6.01	3/4"	10/100



STOP/STOP & WASTE - COMPRESSION TO COMPRESSION - CSA APPROVED

- Cast brass
- Black cast hand wheel
- CSA approved
- Maximum operating temperature: 180°F(82°C)
- Pressure Rating up to 150 PSI

STOP				
PART NO.	UPC	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PESV-CP05	269594	\$ 6.85	1/2"	10/100
PESV-CP07	269600	9.51	3/4"	10/100
STOP & WASTE				
PART NO.	UPC	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PESW-CP05	214242	\$ 7.01	1/2"	10/100
PESW-CP07	214259	9.31	3/4"	10/100



STOP/STOP & WASTE - PEX

- Cast brass
- Maximum operating temperature: 180°F(82°C)
- Pressure Rating up to 150 PSI

PART NO.	UPC	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
U0841P-05	269518	\$ 8.06	1/2"	10/100
U0841P-07	269525	8.82	3/4"	10/100
STOP & WASTE				
U0842P-05	269532	8.19	1/2"	10/100
U0842P-07	269549	8.99	3/4"	10/100



BALL HOSE BIBB 1/4 TURN

- Blue handle
- Maximum operating temperature: 248°F (120°C)
- Pressure Rating up to 200 PSI

PART NO.	UPC	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
U0852-05	254866	\$ 6.23	1/2"	10/100
U0852-07	254873	6.85	3/4"	10/100



BOILER DRAIN VALVES - CSA APPROVED

- Maximum operating temperature: 180°F(82°C)
- Black cast hand wheel
- Cast Brass
- Pressure Rating up to 150 PSI
- CSA approved
- Meets NSF approval

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PEBD-05	316946	\$ 5.30	1/2"	10/100
PEBD-07	316953	5.59	3/4"	10/100



SEDIMENT FAUCETS - O-RING DESIGN - CSA APPROVED

- With O-ring design, the seal is below the threads. The threads are never exposed to the water whereas packing style valves have the thread constantly submerged in water. O-ring design tends to have easier operation and longevity due to the fact that threads do not become corroded in aggressive water conditions.
- To prevent damage to O-rings, stem must be removed before soldering.
- Cast Brass
- CSA approved
- Meets NSF approval

BLUE HANDLE TRIANGULAR	UPC 777808+	ZINC SILVER HANDLE	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PESF-B05	307807	PESF-M05	307821	\$ 4.89	1/2"	10/100
PESF-B07	307814	PESF-M07	307838	6.16	3/4"	10/100



BRONZE VACUUM BREAKER - CSA APPROVED

PART NO.	UPC 777808+	LIST PRICE-A	CONNECTION SIZE	CTN/CASE QUANTITY
U0881-07	214297	\$ 4.98	3/4" MHT x GHT Hose	10/200

This Vacuum Breaker installs easily to any 3/4" hose faucet to provide back-siphonage protection. Standard 3/4" female hose thread for inlet connection and 3/4" male hose thread for outlet connection, along with a break-away set screw make a permanent vandal-proof installation.



ROUGH BRASS HOSE BIBBS

- Maximum operating temperature: 180°F(82°C)
- Pressure Rating up to 150 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PEHB-05	154500	\$ 4.56	1/2"	10/100
PEHB-07	214280	5.60	3/4"	10/100



ROUGH BRASS HOSE BIBBS (NO GARDEN HOSE ATTACHMENT)

- Sampling Faucet
- Maximum operating temperature: 180°F(82°C)
- Pressure Rating up to 150 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
U0874-05	253487	\$ 4.83	1/2"	10/100
U0874-07	253494	5.47	3/4"	10/100



SILLCOCK - CSA APPROVED


- For cold water applications only
- CSA approved
- Maximum operating temperature: 180°F(82°C)
- Pressure Rating up to 150 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
NPT U0873-05	221479	\$ 5.70	1/2"	12/144
U0873-07	221486	6.37	3/4"	12/144
CXC U0873C-05	221493	6.50	1/2"	12/144
U0873C-07	221509	6.67	3/4"	12/144



FROST-PROOF WALL FAUCET WITH SELF-DRAINING VACUUM BREAKER - CSA APPROVED

- Chrome plated body & tube
- Black cast hand wheel
- Garden hose outlet connection
- Built in self-draining vacuum breaker
- CSA approved
- Shipped complete with a plastic insert which ensures that the wall faucet is installed with sufficient angle to drain properly when fastened to the wall



PART NO.	UPC 777808+	LIST PRICE-A	CONNECTION SIZE	LENGTH	CTN/CASE QUANTITY
PEWFBV-54	305681	\$ 17.76	1/2" MPT x 1/2" CxC	4"	2/40
PEWFBV-56	305698	18.76	1/2" MPT x 1/2" CxC	6"	2/40
PEWFBV-58	305704	19.55	1/2" MPT x 1/2" CxC	8"	2/40
PEWFBV-510	305711	20.57	1/2" MPT x 1/2" CxC	10"	2/40
PEWFBV-512	305728	21.64	1/2" MPT x 1/2" CxC	12"	2/40
PEWFBV-514	305735	22.81	1/2" MPT x 1/2" CxC	14"	2/40
PEWFBV-78	305742	20.37	3/4" MPT x 1/2" FPT	8"	2/40
PEWFBV-710	305759	21.37	3/4" MPT x 1/2" FPT	10"	2/40
PEWFBV-712	305766	22.42	3/4" MPT x 1/2" FPT	12"	2/40
PEWFBV-714	305773	23.42	3/4" MPT x 1/2" FPT	14"	2/40



FROST-PROOF WALL FAUCET - CSA APPROVED

- Chrome plated body & tube
- Black cast handle
- Garden hose outlet connection
- Built in self-draining vacuum breaker
- CSA approved
- Shipped complete with a plastic insert which ensures that the lawn faucet is installed with sufficient angle to drain properly when fastened to the wall

PART NO.	UPC 777808+	LIST PRICE-A	CONNECTION SIZE	LENGTH	CTN/CASE QUANTITY
PEWFBV-P58	337286	\$ 20.00	1/2" PEX	8"	2/40
PEWFBV-P510	337347	20.57	1/2" PEX	10"	2/40
PEWFBV-P512	337354	21.64	1/2" PEX	12"	2/40
PEWFBV-P514	337293	23.04	1/2" PEX	14"	2/40



FROST-PROOF WALL FAUCETS - CSA APPROVED

- Chrome plated
- Black cast hand wheel
- Garden hose outlet connection
- CSA approved
- Shipped complete with a plastic insert which ensures that the wall faucet is installed with sufficient angle to drain properly when fastened to the wall

PART NO.	UPC 777808+	LIST PRICE-A	CONNECTION SIZE	LENGTH	CTN/CASE QUANTITY
PEWFB-54	221455	\$ 15.59	1/2" MPT x 1/2" CxC	4"	2/40
PEWFB-56	221462	16.59	1/2" MPT x 1/2" CxC	6"	2/40
PEWFB-58	140831	17.32	1/2" MPT x 1/2" CxC	8"	2/40
PEWFB-510	140756	18.35	1/2" MPT x 1/2" CxC	10"	2/40
PEWFB-512	140824	19.42	1/2" MPT x 1/2" CxC	12"	2/40
PEWFB-514	214303	20.44	1/2" MPT x 1/2" CxC	14"	2/40



FROST-PROOF WALL FAUCETS - BRASS FINISH

- Black cast hand wheel
- Garden hose outlet connection
- CSA approved

PART NO.	UPC 777808+	LIST PRICE-A	CONNECTION SIZE	LENGTH	CTN/CASE QUANTITY
PEWFBFB-58	311897	\$ 17.19	1/2" MPT x 1/2" CxC	8"	2/40
PEWFBFB-510	311903	18.17	1/2" MPT x 1/2" CxC	10"	2/40
PEWFBFB-512	311910	19.28	1/2" MPT x 1/2" CxC	12"	2/40
PEWFBFB-514	311927	20.46	1/2" MPT x 1/2" CxC	14"	2/40



CHROME PLATED SUPPLY VALVES (STOP) 1/4 TURN BALL STYLE

- Provides quick, positive shut off for all household sinks, showers and toilets
- Forged valve bodies, rubber seals
- Temperature rating is 180°F (82°C)
- Pressure rating is up to 125 PSI
- Meets NSF approval
- CSA approved

PART NO.	UPC 777808+	SIZE	LIST PRICE-A	CTN/CASE QUANTITY
STRAIGHT DESIGN				
PE-SV6F-S	254385	3/8" FPT x 3/8" Comp.	\$ 4.65	10
PE-SV8F-S	252282	1/2" FPT x 3/8" Comp.	4.67	10
PE-SV8C-S	252299	1/2" Copper x 3/8" Comp.	5.08	10
PE-SV10CPR-S	252305	5/8" Comp. x 3/8" Comp.	5.64	10
PE-SV8P-S	252312	1/2" PEX x 3/8" Comp.	4.93	10
PE-SV88P-S	252329	1/2" PEX x 1/2" PEX	6.18	10
PE-SV8CPVC-S	274741	1/2" CPVC x 3/8" Comp.	6.66	10
PE-SV8F8S-S	274758	1/2" FPT x 1/2" Slip Joint	5.33	10
PE-SV10CPR8S-S	274765	5/8" Comp. x 1/2" Slip Joint	6.26	10

ANGLE DESIGN				
PE-SV6F-A	254378	3/8" FPT x 3/8" Comp.	4.85	10
PE-SV8F-A	252336	1/2" FPT x 3/8" Comp.	4.71	10
PE-SV8C-A	252343	1/2" Copper x 3/8" Comp.	5.28	10
PE-SV10CPR-A	252350	5/8" Comp. x 3/8" Comp.	5.84	10
PE-SV8P-A	252367	1/2" PEX x 3/8" Comp.	5.05	10
PE-SV8CPVC-A	274772	1/2" CPVC X 3/8" Comp.	6.82	10
PE-SV8F8S-A	274789	1/2" FPT x 1/2" Slip Joint	5.94	10
PE-SV10CPR8S-A	274796	5/8" Comp. x 1/2" Slip Joint	6.86	10

DUAL OUTLET DESIGN				
PE-SV8F64CPR	274802	1/2" FPT x 3/8" Comp. x 1/4" Comp.	6.54	10
PE-SV8F6CPR	274819	1/2" FPT x 3/8" Comp. x 3/8" Comp.	6.66	10
PE-SV1064CPR	274826	5/8" Comp. x 3/8" Comp. x 1/4" Comp.	7.51	10
PE-SV106CPR	274833	5/8" Comp. x 3/8" Comp. x 3/8" Comp.	7.55	10


ICEMAKER BALL TYPE				
PE-SV8F4CPR-A	274840	1/2" FPT x 1/4" Comp.	4.65	10
PE-SV8C4CPR-A	274857	1/2" Copper x 1/4" Comp.	5.21	10
PE-SV10CPR4CPR-A	274864	5/8" Comp. x 1/4" Comp.	5.62	10
PE-SV8P4CPR-A	274871	1/2" Pex x 1/4" Comp.	5.01	10
PE-SV8CPVC4CPR-A	274888	1/2" CPVC x 1/4" Comp.	6.78	10

PEX WITH DRAIN				
PE-SVWD8P-S	315987	1/2" x 1/2" Pex	8.41	10

RETRO-FIT				
● May be installed as a replacement supply stop without removing a previously installed seized stop				
PE-SVRF-S	339761	3/8" Swivel Nut x 3/8" CPR	6.91	10

- WASHING MACHINE - ANGLE DESIGN**
- CSA Approved
 - Meets UPC Approval
 - Not NSF Approved

Blue Handle				
PE-SVWMB-10CPR	356829	5/8" CPR X 3/4" GHT	6.26	10
PE-SVWMB-8P	356836	1/2" Pex X 3/4" GHT	6.26	10
PE-SVWMB-8M	356843	Dual 1/2" M x x 1/2"C x 3/4" GHT	5.98	10
Red Handle				
PE-SVWMR-10CPR	362981	5/8" CPR X 3/4" GHT	6.26	10
PE-SVWMR-8P	363001	1/2" Pex X 3/4" GHT	6.26	10
PE-SVWMR-8M	362998	Dual 1/2" M x x 1/2"C x 3/4" GHT	5.98	10



PE-SVWMB-8M
Dual 1/2" M x x 1/2"C x 3/4" GHT



PVC MOLDED-IN-PLACE BALL VALVES

STANDARD PVC VALVE EPDM SEAT - EPDM STEM "O" RING

FEATURES:

- Shock Resistant
- Working Temperature Range 41°F to 122°F at 150 PSI Working Pressure
- Suitable for Schedule 40 and 80 Pipe
- Variety of water supply, waste water, swimming pool, chemical feed and irrigation applications for residential, commercial, industrial, marine and agriculture
- White PVC body with blue handle

PART NO.	UPC	LIST PRICE-A	PART NO.	UPC	LIST PRICE-A	BORE DIA. Ins.	WGT lbs	SIZE	CTN/CASE QUANTITY
PEBVP-05	229512	\$ 1.49	PEBVP-05S	229574	\$ 1.42	0.55	0.18	1/2"	10/120
PEBVP-07	229529	1.96	PEBVP-07S	229581	1.88	0.79	0.31	3/4"	10/120
PEBVP-10	229536	2.83	PEBVP-10S	229598	2.75	0.98	0.49	1"	10/80
PEBVP-12	229543	3.75	PEBVP-12S	229604	3.60	1.18	0.57	1 1/4"	5/40
PEBVP-15	229550	5.08	PEBVP-15S	229611	4.89	1.42	0.97	1 1/2"	5/30
PEBVP-20	229567	7.38	PEBVP-20S	229628	7.13	1.83	1.50	2"	4/24

DELUXE PVC VALVE EPDM SEAT - EPDM STEM "O" RING - NSF approved 1/2" - 2"

FEATURES:

- Heavy duty thermoplastic
- Shock-resistant PVC body, ball, and handle
- Suitable for Schedule 40 and 80 Pipe
- Excellent flow characteristics
- Meets NSF approval - applies to 0921 Series Sizes 1/2" - 2" only
- Valve body absorbs severe shock load and misalignment minimizing the chance of uneven wear and leakage
- Variety of water supply, waste water, swimming pool, chemical feed, and irrigation applications for residential, commercial, industrial, marine and agricultural use
- White PVC body with blue handle
- 150 PSI Working Pressure at 73°F
- Maintenance free compact design

PART NO.	UPC	LIST PRICE-A	PART NO.	UPC	LIST PRICE-A	PORT DIA. Ins.	WGT lbs	SIZE	CASE QTY
U0921-05	243099	\$ 3.14	U0921S-05	243181	\$ 3.14	0.55	0.18	1/2"	100
U0921-07	243105	3.98	U0921S-07	243198	3.98	0.79	0.31	3/4"	100
U0921-10	243112	5.25	U0921S-10	243204	5.26	0.98	0.49	1"	100
U0921-12	243129	6.53	U0921S-12	243211	6.53	1.18	0.57	1 1/4"	100
U0921-15	243136	10.69	U0921S-15	243228	10.69	1.42	0.97	1 1/2"	48
U0921-20	243143	14.05	U0921S-20	243235	14.05	1.83	1.50	2"	24
U0921-25	243150	28.52	U0921S-25	243242	28.52	2.36	2.87	2 1/2"	12
U0921-30	243167	48.85	U0921S-30	243259	48.85	3.03	3.97	3"	12
U0921-40	243174	92.70	U0921S-40	243266	92.70	3.93	8.09	4"	6

NOTE: EPDM seats are recommended for most cold water system applications. Teflon® seats are chlorine and chemical resistant and are recommended for most pool/spa applications.

Valve with teflon seat available. Contact Sales Representative.



PVC BLOCKED TRUE UNION BALL VALVES

FEATURES:

- Unique double union/double block design permit in-line maintenance without disconnecting pipe
- Bayonet style locks prevent ball from being blown out
- Handle equipped with removable spanner device
- Full, unobstructed flow without any turbulence or pressure drop
- The shorter handle side should be pointing in the direction of the flow
- Maintenance under pressure not recommended
- Working Temperature Range 41°F to 122°F(5°C to 50°C) at 150 PSI working pressure
- Shipped complete with both thread and slip interchangeable connections
- Handtighten only
- Grey PVC body with blue handle

PVC VALVE TEFLON® SEATS - EPDM "O" RING SEAL

PART NO.	UPC	LIST PRICE-A	PORT DIA. INS.	SHIPPING WGT-lbs	SIZE	CASE QTY
U0924-05	243549	\$ 8.13	0.51	0.37	1/2"	48
U0924-07	243556	10.51	0.71	0.55	3/4"	36
U0924-10	243563	14.42	0.91	0.84	1"	24
U0924-12	243570	21.05	1.18	1.28	1 1/4"	24
U0924-15	243587	27.89	1.50	2.03	1 1/2"	24
U0924-20	243594	38.30	1.89	3.86	2"	12

CHEMICAL AND TEMPERATURE CHARACTERISTICS

MATERIAL	ABBRE.	GENERAL CHEMICAL RESISTANCE
Rigid Polyvinyl Chloride	PVC	Resistant against most acids, alkalis and salts of high to low concentration level. However, the material tends to be attacked by some chemicals; such as aromatic hydrocarbon, ketones, esters and chlorinated hydro-carbon.
Ethylene Propylene Rubber	EPDM	Provides excellent ozone and chemical-resistance. Comparatively resistant against ketone and ester, but less resistant against aromatic & aliphatic families and gasoline and oil.
Polytetra-fluoroethylene (Teflon®)	PTFE	Resistant against ordinary acid and alkali and not dissolved nor changed by ordinary solvent medium. Attacked by melted alkali metal and in high temperature by fluorine and chlorine trifluoride.

TEMPERATURE CORRECTION FACTORS FOR VALVES

As temperature increases working pressure decreases. The optimal working pressure for PVC valves contained in this catalogue is 150 PSI @ 73°F. If temperature increases above 73°F, use the PVC correction factor to determine working pressure.

MULTIPLY MAXIMUM WORKING PRESSURE BY CORRECTION FACTOR

EG: @ 110°F WORKING PRESSURE WILL BE 91 PSI (150 X .63 = 91)

°F Temperature	73	90	100	110	120	130	140
PVC Correction Factor	1.00	1.00	1.00	0.83	0.66	0.50	0.33

PVC - NOT RECOMMENDED OVER 140°F

#316 CF8M STAINLESS STEEL BALL VALVES

FEATURES:

- Investment casting
- Blow-out proof stem
- Mounting Pad
- PTFE Seal and Packing
- Threads conform to ASME B1.20.1

- Two-piece full port
- Locking handle
- 1000 W.O.G.

PART NO.	SIZE IPS	LIST PRICE-A	CTN/CASE QUANTITY
SSBV1000-02	1/4"	\$ 17.57	8/56
SSBV1000-03	3/8"	17.94	8/56
SSBV1000-05	1/2"	18.71	8/56
SSBV1000-07	3/4"	25.25	5/30
SSBV1000-10	1"	33.49	9/27
SSBV1000-12	1 1/4"	46.70	6/12
SSBV1000-15	1 1/2"	60.81	5/10
SSBV1000-20	2"	87.23	3/6
SSBV1000-25	2 1/2"	235.71	2
SSBV1000-30	3"	273.48	1

- Two-piece standard port
- Locking handle
- 2000 W.O.G. 1/4" To 3/4"
- 1500 W.O.G. 1" To 2"

PART NO.	SIZE IPS	LIST PRICE-A
SSBV2000-02	1/4"	21.37
SSBV2000-03	3/8"	21.37
SSBV2000-05	1/2"	26.58
SSBV2000-07	3/4"	36.16
SSBV2000-10	1"	56.08
SSBV2000-12	1 1/4"	73.25
SSBV2000-15	1 1/2"	91.63
SSBV2000-20	2"	163.95

