

GENERAL BRASS FITTING INFORMATION

FLARE FITTINGS (BF Model Prefix)

- Suitable for use in the Plumbing and Heating Industries
- Forged fittings generally used for gas, oil, air and water
- Applicable with aluminum, brass, copper and steel tubing
- Two piece assembly, Nut and Body, sold separately
- Can disassemble and reassemble many times with no effect on the seal
- Resistant to mechanical pullout
- Long nuts are recommended for higher vibration applications
- For use in applications with temperature range of -65°F to + 250°F




Flare Installation:

1. Cut tube end squarely
2. Position flare nut on tube so threads are facing tube end
3. Flare end of tube
4. Hand tighten assembly and secure with an additional 1/6th (60°) turn **CAUTION: DO NOT OVER TIGHTEN!**

COMPRESSION FITTINGS (BC Model Prefix)

- Suitable for use in low to medium pressure applications
- Minimal preparation work of tube required
- Applicable with aluminum and copper tubing
- Three piece assembly, Nut, Sleeve and Body (Sold completely assembled)
- Short nuts are recommended for use in applications where vibration does not exist
- Long nuts are recommended for additional vibration resistance
- For use in applications with temperature range of -65°F to +250°F

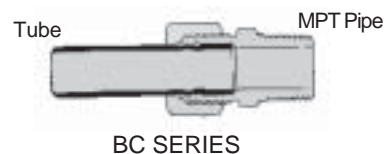

Compression Installation:

1. Cut tube end squarely
2. Position nut followed by sleeve on tube so threads are facing tube end
3. Push tube into compression body ensuring it is against the built in stop
4. Hand tighten assembly and secure with an additional turn according to chart

TUBE O.D.	To seal turn with wrench from hand-tight position
Up to 1/4"	1 1/4 turn
5/16"	1 3/4 turn
3/8" and up	2 1/4 turn


CAUTION: DO NOT OVER TIGHTEN!

HOSE BARB FITTINGS (BH Model Prefix)

- Suitable for use with various hose and tubing
- Check with hose or tube manufacturer to ensure hose barb is suitable for application
- For use in applications with temperature range of -40°F to +160°F


Hose Barb Installation:

1. Cut hose to length
2. Place clamp onto hose
3. Lubricate hose barb
4. Position hose on the barb 1/4" back from hex
5. Tighten Clamp

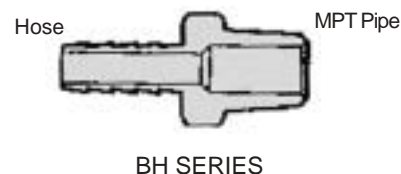


POLY BARB FITTINGS (BT Model Prefix)

- Suitable for use with polyethylene tubing
- Excellent vibration resistance
- For use in applications with temperature range of -40°F to +135°F

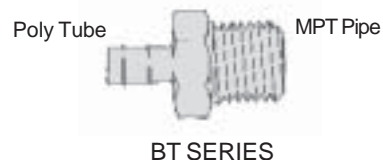

GARDEN HOSE FITTINGS (BG Model Prefix)

- Suitable for use in commercial or industrial plumbing
- Maximum working pressure 150 psi at 73°F
- Always check the maximum working pressure of the hose

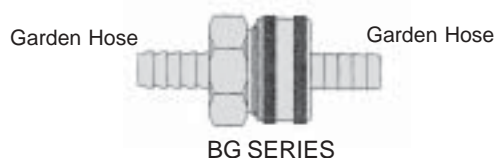


GENERAL BRASS FITTING INFORMATION

02	03	04	05	06	07	08	10	12	14	16
1/8"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	5/8"	3/4"	7/8"	1"

*Code used with all Brass Fittings in Section 4. Always use Tube Size followed by Pipe Size

Example:


BF-48-0608

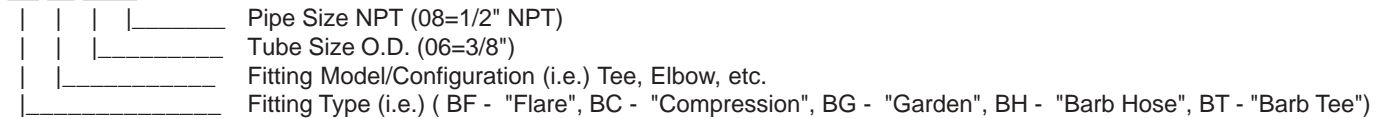

Actual Outside Diameter of Pipe

1/16 NPT	1/8 NPT	1/4 NPT	3/8 NPT	1/2 NPT	3/4 NPT	1 NPT
27(TPI)	27(TPI)	18(TPI)	18(TPI)	14(TPI)	14(TPI)	11 1/2(TPI)
O.D.=0.3125"	O.D.=0.405"	O.D.=0.540"	O.D.=0.675"	O.D.=0.840"	O.D.=1.050"	O.D.=1.315"


NPT (National Pipe Thread)
TPI (Threads Per Inch)

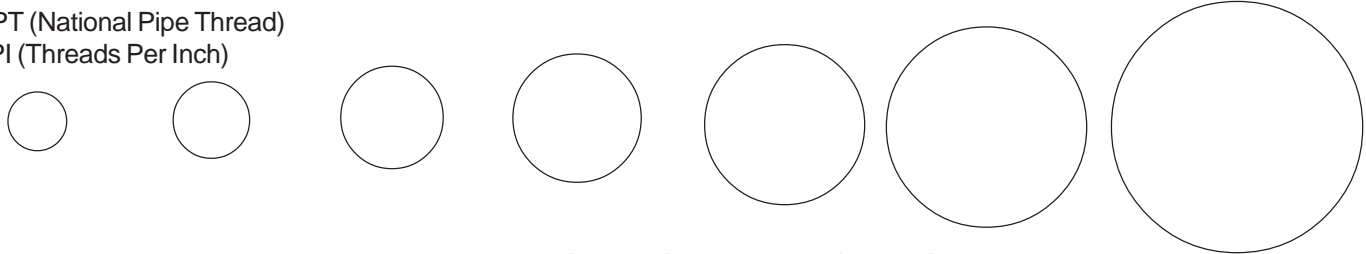

Actual Outside Diameter of Tubing


1/16"	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	7/16"
(0.0625")	(0.125")	(0.1563")	(0.1875")	(0.250")	(0.3125")	(0.375")	(0.4375")

1/2"	5/8"	3/4"	7/8"	1"
(0.500")	(0.625")	(0.750")	(0.875")	(1.000")

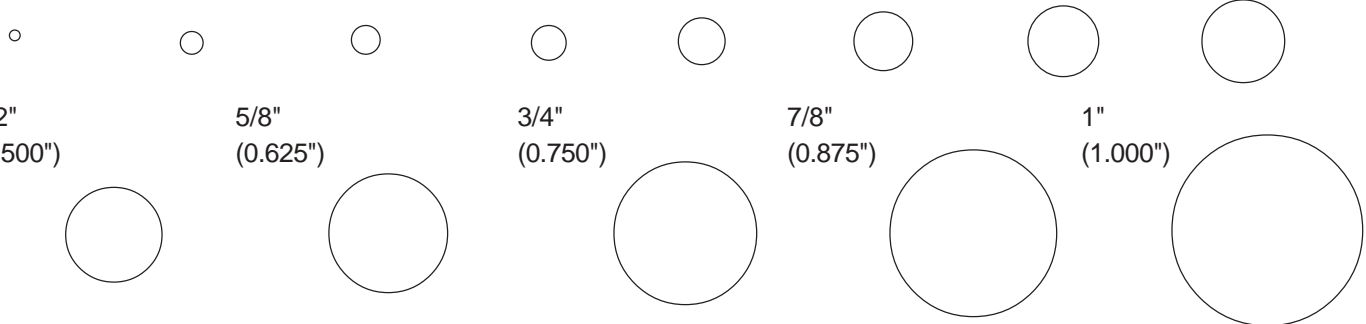


Fraction	Decimal	mm	Fraction	Decimal	mm	Fraction	Decimal	mm	Fraction	Decimal	mm
1/64"	0.0156	0.396	17/64"	0.2656	6.746	33/64"	0.5164	13.096	49/64"	0.7656	19.446
1/32"	0.0312	0.793	9/32"	0.2812	7.143	17/32"	0.5312	13.493	25/32"	0.7812	19.843
3/64"	0.0468	1.190	19/64"	0.2968	7.540	35/64"	0.5468	13.890	51/64"	0.7968	20.240
1/16"	0.0625	1.587	5/16"	0.3125	7.937	9/16"	0.5625	14.287	13/16"	0.8125	20.637
5/64"	0.0781	1.984	21/64"	0.3281	8.334	37/64"	0.5781	14.684	53/64"	0.8281	21.034
3/32"	0.0937	2.381	11/32"	0.3437	8.731	19/32"	0.5937	15.081	27/32"	0.8437	21.431
7/64"	0.1093	2.778	23/64"	0.3593	9.128	39/64"	0.6093	15.478	55/64"	0.8593	21.828
1/8"	0.1250	3.175	3/8"	0.3750	9.525	5/8"	0.6250	15.875	7/8"	0.8750	22.225
9/64"	0.1406	3.571	25/64"	0.3906	9.921	41/64"	0.6406	16.271	57/64"	0.8906	22.621
5/32"	0.1562	3.968	13/32"	0.4062	10.318	21/32"	0.6562	16.668	29/32"	0.9062	23.018
11/64"	0.1718	4.365	27/64"	0.4218	10.715	43/64"	0.6718	17.065	59/64"	0.9218	23.415
3/16"	0.1875	4.762	7/16"	0.4375	11.112	11/16"	0.6875	17.462	15/16"	0.9375	23.812
13/64"	0.2031	5.159	29/64"	0.4531	11.509	45/64"	0.7031	17.859	61/64"	0.9531	24.209
7/32"	0.2187	5.556	15/32"	0.4687	11.906	23/32"	0.7187	18.256	31/32"	0.9687	24.606
15/64"	0.2343	5.953	31/64"	0.4843	12.303	47/64"	0.7343	18.653	63/64"	0.9843	25.003
1/4"	0.2500	6.350	1/2"	0.5000	12.700	3/4"	0.7500	19.050	1"	1.0000	25.400

FLARE FITTINGS




SHORT FORGED FLARE NUT

PART NO.	LIST PRICE-B	SIZE
BF-40-04	\$ 1.34	1/4
BF-40-06	1.77	3/8
BF-40-08	2.08	1/2
BF-40-10	3.36	5/8
BF-40-12	9.63	3/4




LONG FLARE NUT

BF-41-04	1.65	1/4
BF-41-05	2.45	5/16
BF-41-06	1.65	3/8
BF-41-08	2.51	1/2
BF-41-10	4.58	5/8




SHORT FLARE NUT

BF-41S-04	0.67	1/4
BF-41S-05	1.04	5/16
BF-41S-06	1.04	3/8
BF-41S-08	1.34	1/2
BF-41S-10	2.38	5/8
BF-41S-12	7.51	3/4




**FEMALE COUPLING
FLARE X FEMALE PIPE**

BF-46-0402	1.41	1/4 X 1/8
BF-46-0404	1.88	1/4 X 1/4
BF-46-0604	1.65	1/2 X 3/8
BF-46-0606	1.65	3/8 X 3/8
BF-46-0806	2.57	1/2 X 3/8
BF-46-0808	2.69	1/2 X 1/2
BF-46-1008	2.87	5/8 X 1/2



**FLARE TEE
FLARE THREE ENDS**

BF-44-04	2.49	1/4
BF-44-06	3.24	3/8
BF-44-08	5.14	1/2
BF-44-10	6.24	5/8

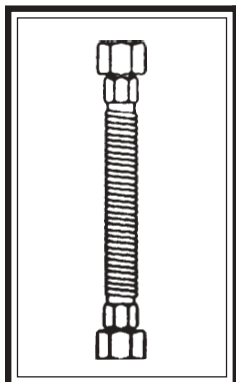

STAINLESS STEEL GAS APPLIANCE CONNECTORS


PART NO.	UPC 777808+	LIST PRICE-B	DESCRIPTION	LENGTH	CTN
PE-GACF8-36	180059	\$ 41.82	1/2" F.I.P. x 1/2" F.I.P.	36"	10
PE-GACF8-48	180066	49.78	1/2" F.I.P. x 1/2" F.I.P.	48"	10
PE-GACF8-72	214051	67.93	1/2" F.I.P. x 1/2" F.I.P.	72"	10

STEEL FITTINGS

PART NO.	UPC 777808+	LIST PRICE-B	DESCRIPTION	CTN
PE-GACF-F8	180103	\$ 7.00	1/2" FEMALE G.A.C. FITTING	10
PE-GACF-M8	180073	6.97	1/2" MALE G.A.C. FITTING	10


**HALF UNION
FLARE X MALE PIPE**

PART NO.	LIST PRICE-B	SIZE
BF-48-0402	\$ 0.92	1/4 X 1/8
BF-48-0404	0.98	1/4 X 1/4
BF-48-0604	1.47	3/8 x 1/4
BF-48-0606	1.71	3/8 x 3/8
BF-48-0608	2.02	3/8 x 1/2
BF-48-0806	2.08	1/2 x 3/8
BF-48-0808	2.45	1/2 x 1/2
BF-48-0812	4.03	1/2 x 3/4
BF-48-1008	4.40	5/8 x 1/2
BF-48-1012	4.71	5/8 x 3/4
BF-48-1212	6.72	3/4 x 3/4




UNION COUPLING

BF-42-04	0.92	1/4
BF-42-06	1.83	3/8
BF-42-08	2.57	1/2
BF-42-10	4.03	5/8
BF-42-12	15.74	3/4




REDUCING UNION COUPLING

BF-42R-0604	1.62	3/8 X 1/4
BF-42R-0806	3.12	1/2 X 3/8
BF-42R-1008	3.73	5/8 X 1/2




**ELBOW -
FLARE X MALE PIPE**

BF-49-0402	1.71	1/4 X 1/8
BF-49-0404	2.20	1/4 X 1/4
BF-49-0604	2.20	3/8 x 1/4
BF-49-0606	2.20	3/8 x 3/8
BF-49-0608	3.73	3/8 x 1/2
BF-49-0806	5.93	1/2 x 3/8
BF-49-0808	5.93	1/2 x 1/2
BF-49-1008	5.01	5/8 x 1/2




INVERTED FLARE NUT

BF-41INB-04	0.90	1/4
BF-41INB-05	1.05	5/16





COMPRESSION FITTINGS





SLEEVE		
PART NO.	LIST PRICE-B	SIZE
BC-60-02	\$ 0.26	1/8
BC-60-03	0.18	3/16
BC-60-04	0.18	1/4
BC-60-05	0.18	5/16
BC-60-06	0.18	3/8
BC-60-07	0.36	7/16
BC-60-08	0.24	1/2
BC-60-10	0.31	5/8
BC-60-12	0.49	3/4
BC-60-14	0.61	7/8

BRASS INSERT		
PART NO.	LIST PRICE-B	SIZE
BC-61P-02	\$ 0.72	1/8
BC-61P-03	1.02	3/16
BC-61P-04	0.24	1/4
BC-61P-05	0.28	5/16
BC-61P-06	0.30	3/8
BC-61P-08	0.40	1/2
BC-61P-10	0.42	5/8





NUT		
PART NO.	LIST PRICE-B	SIZE
BC-61-03	0.43	3/16
BC-61-04	0.43	1/4
BC-61-05	0.43	5/16
BC-61-06	0.49	3/8
BC-61-08	0.67	1/2
BC-61-10	0.79	5/8
BC-61-12	1.97	3/4
BC-61-14	1.77	7/8

UNION COUPLING COMP. X COMP.		
PART NO.	LIST PRICE-B	SIZE
BC-62-02	1.41	1/8
BC-62-03	1.53	3/16
BC-62-04	1.59	1/4
BC-62-05	2.02	5/16
BC-62-06	2.02	3/8
BC-62-07	8.59	7/16
BC-62-08	2.93	1/2
BC-62-10	3.36	5/8
BC-62-12	6.60	3/4
BC-62-14	7.40	7/8




CONNECTOR COMPRESSION X MALE PIPE		
PART NO.	LIST PRICE-B	SIZE
BC-68-0202	1.88	1/8 x 1/8
BC-68-0302	1.34	3/16 x 1/8
BC-68-0304	3.28	3/16 x 1/4
BC-68-0402	1.34	1/4 x 1/8
BC-68-0404	1.34	1/4 x 1/4
BC-68-0406	1.96	1/4 x 3/8
BC-68-0408	2.69	1/4 x 1/2
BC-68-0602	2.38	3/8 x 1/8
BC-68-0604	2.20	3/8 x 1/4
BC-68-0606	2.69	3/8 x 3/8
BC-68-0608	3.00	3/8 x 1/2
BC-68-0804	2.87	1/2 x 1/4
BC-68-0806	2.87	1/2 x 3/8
BC-68-0808	3.12	1/2 x 1/2
BC-68-1008	4.03	5/8 x 1/2
BC-68-1212	6.36	3/4 x 3/4
BC-68-1412	7.40	7/8 x 3/4

ELBOW COMPRESSION X MALE PIPE		
PART NO.	LIST PRICE-B	SIZE
BC-69-0402	2.57	1/4 x 1/8
BC-69-0404	2.57	1/4 x 1/4
BC-69-0406	4.44	1/4 x 3/8
BC-69-0604	2.57	3/8 x 1/4
BC-69-0606	3.06	3/8 x 3/8
BC-69-0608	3.36	3/8 x 1/2
BC-69-0612	13.36	3/8 x 3/4
BC-69-0806	3.09	1/2 x 3/8
BC-69-0808	4.03	1/2 x 1/2
BC-69-1006	5.20	5/8 x 3/8
BC-69-1008	6.11	5/8 x 1/2




ELBOW - COMPRESSION X COMPRESSION		
PART NO.	LIST PRICE-B	SIZE
BC-65-02	6.48	1/8
BC-65-03	7.11	3/16
BC-65-04	2.87	1/4
BC-65-05	3.36	5/16
BC-65-06	3.06	3/8
BC-65-08	5.26	1/2
BC-65-10	6.11	5/8

TEE - COMPRESSION X MALE PIPE		
PART NO.	LIST PRICE-B	SIZE
BC-64-02	9.61	1/8
BC-64-03	3.03	3/16
BC-64-04	3.36	1/4
BC-64-05	3.42	5/16
BC-64-06	4.03	3/8
BC-64-08	6.11	1/2
BC-64-10	7.76	5/8
BC-64-14	20.61	7/8



FEMALE COUPLING COMPRESSION X FEMALE PIPE		
PART NO.	LIST PRICE-B	SIZE
BC-66-0402	1.77	1/4 X 1/8
BC-66-0404	1.90	1/4 X 1/4
BC-66-0604	2.26	3/8 X 1/4
BC-66-0606	2.32	3/8 X 3/8
BC-66-0808	2.93	1/2 X 1/2



PRODUCT IN SECTION 4
IS NOT INDIVIDUALLY
BAR CODED



Telephone: 1-888-838-8801
Fax: 1-519-595-4380
Web: www.plumbeeze.com

4-5
June 5/06



BLACK & GALVANIZED COMBINATION NIPPLES FOR HOSE


BLACK PART NO.	LIST PRICE-A	GALVANIZED PART NO.	LIST PRICE-A	SIZE	NO. OF BARBS	LENGTH	CTN QTY
BLCN-050	\$ 1.82	GCN-050	\$ 2.36	1/2	6	3 1/8	100
BLCN-075	2.23	GCN-075	2.64	3/4	6	3 1/8	100
BLCN-100	3.22	GCN-100	3.61	1	6	3 3/8	25
BLCN-125	3.95	GCN-125	4.38	1 1/4	6	3 1/4	25
BLCN-150	5.33	GCN-150	5.82	1 1/2	7	4 1/8	25
BLCN-200	7.19	GCN-200	8.07	2	8	4 3/4	25
BLCN-250	22.67	GCN-250	23.82	2 1/2	8	5 3/4	12
BLCN-300	28.32	GCN-300	29.33	3	8	6	5
BLCN-400	38.39	GCN-400	39.79	4	8	7 1/4	4



GALVANIZED HOSE MENDERS

GHM-050	5.88	1/2	6	3 1/2	100
GHM-075	6.39	3/4	6	4 1/4	100
GHM-100	6.41	1	6	4 1/4	25
GHM-125	7.15	1 1/4	6	4 1/4	25
GHM-150	10.65	1 1/2	7	4 5/8	25
GHM-200	18.97	2	7	4 7/8	25
GHM-250	25.56	2 1/2	8	6	6
GHM-300	32.64	3	8	6 5/8	5
GHM-400	49.55	4	8	8	4

HOSE BARBS




COUPLER - BARB X MALE PIPE

PART NO.	LIST PRICE-B	SIZE
BH-125-0202	\$ 2.02	1/8 X 1/8
BH-125-0204	2.32	1/8 X 1/4
BH-125-0302	1.68	3/16 X 1/4
BH-125-0402	0.92	1/4 X 1/8
BH-125-0404	0.98	1/4 X 1/4
BH-125-0406	1.65	1/4 X 3/8
BH-125-0408	5.27	1/4 X 1/2
BH-125-0502	1.63	5/16 X 1/8
BH-125-0504	1.10	5/16 X 1/4
BH-125-0506	3.36	5/16 X 3/8
BH-125-0604	1.28	3/8 X 1/4
BH-125-0606	1.83	3/8 X 3/8
BH-125-0608	2.38	3/8 X 1/2
BH-125-0804	1.83	1/2 X 1/4
BH-125-0806	2.20	1/2 X 3/8
BH-125-0808	2.51	1/2 X 1/2
BH-125-0812	3.36	1/2 X 3/4
BH-125-1006	2.98	5/8 X 3/8
BH-125-1008	2.69	5/8 X 1/2
BH-125-1208	3.12	3/4 X 1/2
BH-125-1212	3.67	3/4 X 3/4
BH-125-1616	8.68	1 X 1


SPLICER - BARB X BARB

PART NO.	LIST PRICE-B	SIZE
BH-129-02	\$ 3.70	1/8
BH-129-03	2.36	3/16
BH-129-04	0.98	1/4
BH-129-05	2.98	5/16
BH-129-06	2.23	3/8
BH-129-08	1.77	1/2
BH-129-10	4.09	5/8
BH-129-12	5.45	3/4




ELBOW - BARB X MALE PIPE

BH-139-0402	1.47	1/4 x 1/8
BH-139-0404	2.32	1/4 x 1/4
BH-139-0604	2.02	3/8 x 1/4
BH-139-0606	5.92	3/8 x 3/8
BH-139-0608	8.14	3/8 x 1/2



MINI BARBS




MINI BARB X MALE PIPE

PART NO.	LIST PRICE-A	TUBE O.D.	TUBE I.D.	PIPE
BT-968-0402	\$ 2.30	1/4	.170	1/8
BT-968-0404	3.77	1/4	.170	1/4
BT-968-0602	2.93	3/8	.250	1/8
BT-968-0604	3.67	3/8	.250	1/4
BT-968-0806	6.05	1/2	.375	3/8


ELBOW - MINI BARB X MINI BARB

PART NO.	LIST PRICE-A	TUBE O.D.	TUBE I.D.
BT-965-04	\$ 4.19	1/4	.170
BT-965-06	4.68	3/8	.250
BT-965-08	5.50	1/2	.375




TEE - MINI BARB THREE ENDS

BT-964-04	2.44	1/4	.170
BT-964-06	3.94	3/8	.250
BT-964-08	7.01	1/2	.375




MINI BARB X MINI BARB

BT-962-04	2.40	1/4	.170
BT-962-06	1.91	3/8	.250
BT-962-08	4.57	1/2	.375



PRODUCT IN SECTION 4 IS NOT INDIVIDUALLY BAR CODED

GARDEN HOSE FITTINGS



CONNECTOR - BARB X MALE HOSE

PART NO.	LIST PRICE-B	SIZE
BG-193-0612	\$ 6.02	3/8 X 3/4
BG-193-0812	4.82	1/2 X 3/4
BG-193-1012	4.57	5/8 X 3/4
BG-193-1212	6.20	3/4 X 3/4




**SWIVEL CONNECTOR
BARB X FEMALE HOSE**

c/w Washer		
PART NO.	LIST PRICE-B	SIZE
BG-195-0612	6.66	3/8 X 3/4
BG-195-0812	6.06	1/2 X 3/4
BG-195-1012	4.62	5/8 X 3/4
BG-195-1212	6.97	3/4 X 3/4




GARDEN HOSE BARB SET

c/w Washer		
PART NO.	LIST PRICE-B	SIZE
BG-193-195-06	11.98	3/8
BG-193-195-08	9.91	1/2
BG-193-195-10	12.29	5/8
BG-193-195-12	10.05	3/4




**COUPLING -
FEMALE HOSE X FEMALE PIPE**

PART NO.	LIST PRICE-B	SIZE
BG-198-1208	3.19	3/4 X 1/2
BG-198-1212	3.76	3/4 X 3/4




**COUPLING -
MALE HOSE X MALE PIPE**

PART NO.	LIST PRICE-B	SIZE
BG-196-1206	8.44	3/4 X 3/8
BG-196-1208	3.36	3/4 X 1/2
BG-196-1212	3.48	3/4 X 3/4



**COUPLING -
MALE HOSE X FEMALE PIPE**

PART NO.	LIST PRICE-B	SIZE
BG-197-1208	5.28	3/4 X 1/2
BG-197-1212	3.24	3/4 X 3/4




**COUPLING -
MALE HOSE X MALE HOSE**

PART NO.	LIST PRICE-B	SIZE
BG-196W-1212	3.42	3/4 X 3/4


**COUPLING
FEMALE HOSE X MALE PIPE**

PART NO.	LIST PRICE-B	SIZE
BG-199-1208	\$ 5.08	3/4 X 1/2
BG-199-1212	3.85	3/4 X 3/4




**SWIVEL COUPLING -
FEMALE HOSE X FEMALE PIPE**

PART NO.	LIST PRICE-B	SIZE
BG-199S-1208	6.16	3/4 X 1/2
BG-199S-1212	5.14	3/4 X 3/4




**SWIVEL COUPLING -
FEMALE HOSE X FEMALE HOSE**

c/w Washer		
PART NO.	LIST PRICE-B	SIZE
BG-203-12	2.93	3/4




**SWIVEL CONNECTOR -
FEMALE HOSE X MALE PIPE**

PART NO.	LIST PRICE-B	SIZE
BG-194-1204	9.82	3/4 X 1/4
BG-194-1206	9.98	3/4 X 3/8
BG-194-1208	8.83	3/4 X 1/2




**"Y" COUPLING -
MALE HOSE X FEMALE HOSE**

ZINC CAST BRASS		
PART NO.	LIST PRICE-B	SIZE
BG-202Z-12	8.76	3/4
BG-202-12	9.44	3/4



DOUBLE KNURL CAP NUT


c/w Washer		
PART NO.	LIST PRICE-B	SIZE
BG-200-12	2.02	3/4



GARDEN HOSE WASHER

PART NO.	LIST PRICE-B	SIZE
BG-GHW-12	0.94	3/4

SOLD IN BAGS OF 100 ONLY



PRODUCT IN SECTION 4
IS NOT INDIVIDUALLY
BAR CODED



Telephone: 1-888-838-8801
Fax: 1-519-595-4380
Web: www.plumbeeze.com

4-7
June 5/06



PVC CLEAR TUBING

FEATURES

- NON-TOXIC
- ODOURLESS&TASTE-FREE
- NONCONDUCTIVE
- FIRE RESISTANT
- SELF-EXTINGUISHING
- FDA COMPOUNDS USED COMPLY WITH FDA STANDARDS
- NSF CERTIFIED UNDER STANDARD NSF 51
- TYPE 10

TYPICAL APPLICATIONS

- LABORATORY
- FOOD & BEVERAGE
- DRAIN LINES
- WATER AND CHEMICAL TRANSFER
- WIRE HARNESS
- SIGHT GAUGES
- LIGHT VACUUM LINES

Temperature Range: 25°F (-5°C) to 150°F (65°C)

PART NO.	LIST PRICE-A PER FOOT	SIZE		LENGTH	WORKING PSI @ 20°C	WALL THICKNESS	WEIGHT PER CFT
		I.D.	O.D.				
106-0204-100	\$ 0.24	1/8	1/4	100 FT.	65	.063	1.9 LBS
106-0305-100	0.27	3/16	5/16	100 FT.	55	.063	2.6 LBS
106-0406-100	0.29	1/4	3/8	100 FT.	55	.063	3.2 LBS
106-0408-100	0.52	1/4	1/2	100 FT.	60	.125	7.6 LBS
106-0507-100	0.33	5/16	7/16	100 FT.	50	.063	3.8 LBS
106-0608-100	0.35	3/8	1/2	100 FT.	45	.063	4.5 LBS
106-0610-100	0.71	3/8	5/8	100 FT.	55	.125	10.2 LBS
106-0810-100	0.45	1/2	5/8	100 FT.	30	.063	5.7 LBS
106-0812-100	0.98	1/2	3/4	100 FT.	45	.125	12.8 LBS
106-1014-100	1.16	5/8	7/8	100 FT.	40	.125	12.5 LBS
106-1216-100	1.31	3/4	1	100 FT.	35	.125	17.9 LBS
106-1418-100	1.96	7/8	1 1/8	100 FT.	30	.125	20.4 LBS
106-1620-100	1.75	1	1 1/4	100 FT.	25	.125	23.0 LBS
106-2024-100	2.36	1 1/4	1 1/2	100 FT.	20	.125	28.1 LBS
106-2430-100	4.79	1 1/2	1 7/8	100 FT.	30	.1875	51.7 LBS
106-3240-100	7.71	2	2 1/2	100 FT.	35	.250	92.0 LBS

PRODUCT IN SECTION 4 IS NOT INDIVIDUALLY BAR CODED



CLEAR BRAIDED P.V.C. HOSE - STANDARD WALL

Please note applications are general. However, the degree of resistance of a material also depends on other variables such as length of exposure, temperature, pressure, velocity of fluid, concentration, etc. and therefore no guarantee is expressed or implied. If an element of doubt exists, we advise that the product be tested under actual conditions. Crystal clear polyvinyl chloride reinforced with spiraled polyester cords. Cover and tube are compounded from Non-Toxic PVC ingredients in compliance with applicable FDA requirements.

FEATURES

- GLASS SMOOTH INTERIOR
- CHEMICAL RESISTANT
- SELF-EXTINGUISHING
- NON-MARKING
- LIGHTWEIGHT
- OZONE & ATMOSPHEREIC RESISTANT
- NSF CERTIFIED UNDER STANDARD NSF-51
- TYPE 20
- CLEAR PVC TUBE. POLYESTER REINFORCED
- FLEXIBLE
- TIGHT TOLERANCES
- FDA COMPOUNDS USED COMPLY WITH FDA STANDARDS

INDUSTRIAL APPLICATIONS

- PNEUMATIC LINES
- LUBRICATION LINES
- AIR & WATER LINES
- PACKAGING MACHINES
- GLUE LINES
- AIR BREATHING LINES
- VACUUM LINES (CALL FACTORY FOR RATING)
- DEIONIZED WATER SYSTEMS
- WIRE CONDUIT

Service Temperature Range: 25°F (-5°C) to 150°F (65°C)

PART NO.	LIST PRICE-A PER FOOT	NOMINAL MAXIMUM WORKING PRESSURE						LENGTH IN FEET	APPROX. WGT. PER CFT.
		I.D.	O.D.	@ 70°F (21°C)		@ 122°F (50°C)			
			PSI	MPa	PSI	MPa			
107-03-100	\$ 0.53	3/16	.375	250	(1.72)	150	(1.03)	100 FT	4.5 LBS
107-04-100	0.57	1/4	.460	250	(1.72)	150	(1.03)	100 FT	6.5 LBS
107-05-100	0.68	5/16	.525	250	(1.72)	135	(0.93)	100 FT	7.5 LBS
107-06-100	0.80	3/8	.600	225	(1.55)	125	(0.86)	100 FT	9.0 LBS
107-08-100	1.05	1/2	.750	200	(1.38)	100	(0.69)	100 FT	14.5 LBS
107-08-300	1.05	1/2	.750	200	(1.38)	100	(0.69)	300 FT	14.5 LBS
107-10-100	1.36	5/8	.875	200	(1.38)	100	(0.69)	100 FT	16.5 LBS
107-12-100	1.68	3/4	1.030	150	(1.03)	85	(0.58)	100 FT	23.0 LBS
107-12-300	1.68	3/4	1.030	150	(1.03)	85	(0.58)	300 FT	23.0 LBS
107-16-100	2.16	1	1.312	125	(0.86)	75	(0.52)	100 FT	32.0 LBS
107-16-200	2.16	1	1.312	125	(0.86)	75	(0.52)	200 FT	32.0 LBS
107-20-050	4.01	1 1/4	1.687	100	(0.69)	55	(0.38)	50 FT	58.0 LBS
107-20-100	4.01	1 1/4	1.687	100	(0.69)	55	(0.38)	100 FT	58.0 LBS
107-24-050	4.81	1 1/2	1.937	100	(0.69)	50	(0.34)	50 FT	69.0 LBS
107-24-100	4.81	1 1/2	1.937	100	(0.69)	50	(0.34)	100 FT	69.0 LBS
107-32-050	7.77	2	2.500	75	(0.51)	35	(0.24)	50 FT	100.0 LBS
107-32-100	7.77	2	2.500	75	(0.51)	35	(0.24)	100 FT	100.0 LBS



POLYETHYLENE TUBING - FOOD GRADE

FEATURES

- LIGHTWEIGHT TUBING
- ODOURLESS AND TASTELESS
- MATERIALS COMPLY WITH THE F.D.A. SPECIFICATIONS
- LOW DENSITY
- RESISTANCE TO STRESS CRACKING
- MILKY WHITE COLOUR

TYPICAL APPLICATIONS

- AIR INSTRUMENTATION
- WATER LINES
- TRANSMISSION LINES
- CHEMICAL SPRAY
- BEVERAGE AND SODA TRANSFER
- LIGHT VACUUM LINE
- CONDUIT
- PNEUMATIC CONTROL TUBING

Temperature Range: -40°F (-45°C) to 150°F (65°C)

COIL PART NO.	LIST-A PER FT.	LENGTH	SIZE		WORKING PSI	WALL THICK.	WEIGHT PER CFT.
			O.D.	I.D.			
105-04H-100	\$ 0.21	100 FT.	1/4"	.125	150	.062	1.5 LBS
105-04-100	0.17	100 FT.	1/4"	.170	140	.040	1.1 LBS
105-06-100	0.29	100 FT.	3/8"	.250	125	.062	2.5 LBS
105-08-100	0.40	100 FT.	1/2"	.375	100	.062	3.5 LBS
105-10-100	0.49	100 FT.	5/8"	.500	75	.062	4.5 LBS


MODULAR TILT BIN SYSTEMS

Create your own custom designed storage system, these modular cabinets are stackable and mountable and easily labelled. Bins can be divided easily with plastic dividers (sold separately) and can also be fitted with locking rods to prevent the bins from opening if units are transported.

These popular tip out bins, minimizes the chance of parts getting put back into the wrong bins which is a big problem in displays using open front bins or drawers with multiple dividers.

BINS

PART NO.	BIN UNITS	TAG HOLDER	DIMENSIONS (INS)			QTY	CARTON WG- lbs
			WIDTH	HEIGHT	DEPTH		
Horizontal Bin Units							
MD-TOB9	9	No	23-5/8	3-5/16	2-1/2	12	42
MD-TOB6	6	Yes	23-5/8	4-1/2	3-5/8	12	34
MD-TOB2L	2	No	11-13/16	4-1/2	3-5/8	16	29
MD-TOB5	5	Yes	23-5/8	6-1/2	5-1/4	6	29
MD-TOB4	4	Yes	23-5/8	8-1/8	6-5/8	6	42
MD-TOB3	3	Yes	23-5/8	9-1/2	7-3/4	4	34
Vertical Bin Unit							
MD-TOBV6	6	Yes	4-1/2	24-1/2	3-5/8	12	34

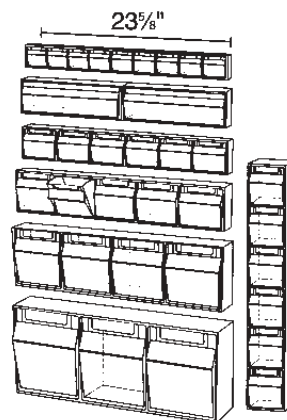

Tab/Channel Nut



These tip out bins are easily fastened to the frames below (sold separately), by sliding the bin units onto the frame from the top until it sits firmly on either the angle iron stop or the bin previously fastened.

WALL MOUNT / FLOOR STAND FRAMES

The wall mount and floor stand frames are made from heavy gauge steel frames which are then painted using a coating process in which the paint is baked on to ensure a superior long lasting finish. These frames can be assembled in a number of configurations to make 24" and 48" single and double sided floor stand units or can be wall mounted or fastened to existing peg board displays.

PART NO.

WALL MOUNT FRAME

MD-WMF24

23-3/8"W x 64-1/2"H x 1-1/2"D Channel Frame

FLOOR STAND KIT

MD-FSK24 23-3/8"W x 10-1/2"H x 10-3/4"D

Kit includes (2) triangular end frames, cross bar and hardware

CONNECTOR BAR (48" DISPLAYS ONLY)

MD-FSC48 47-5/8"L x 2"W x 1/8" Thick. Steel connector bar used to fasten two 24" frames together for 48" unit



HARDWARE

MD-TOB-MS 1/4" x 3/4" mach. screw (Quantity 1 = 25 pack)

MD-TOB-CN 1/4" tab/channel nuts (Quantity 1 = 25 pack)

MD-PBB 1" x 5" Peg Board Bracket Kit (2 brackets & 4 plastic rivets)

MD-PBR Plastic Drive Rivet 1/4" Dia. x 3/4" L for MD-PBB (Qty 1 = 10 pack)

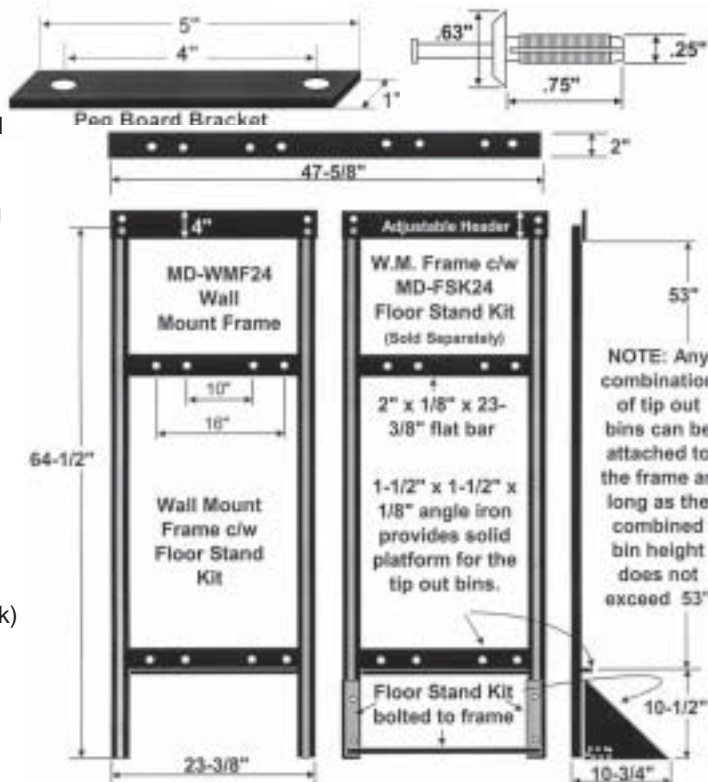

CAUTION: For safety reasons it is important that wall mount units be securely fastened to the wall by appropriate fastening systems suited to the material you are mounting the units on. Consult a fastener expert for advice.


For complete ordering information, please call your Inside Sales Representative.

TYPICAL DISPLAY UNITS

Below are some typical display units, Plumbeeze has both a plumbing kit (24" single sided) and Industrial fitting kit (48" single sided). These are suggestions only. You can build your own custom displays using any configuration of the horizontal tip out bins.




FRONT VIEW
24" SINGLE AND DOUBLE
SIDED DISPLAYS

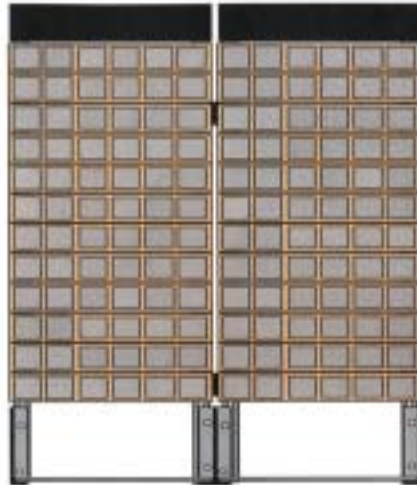

FRONT VIEW
48" SINGLE AND DOUBLE
SIDED DISPLAYS



SIDE VIEW
24" & 48"
SINGLE SIDE DISPLAYS

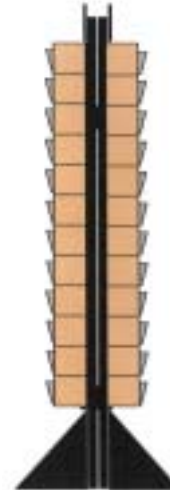

SIDE VIEW
24" & 48"
DOUBLE SIDE DISPLAYS



MD-TOB-MS



MD-TOB-CN

PARTS LIST FOR TYPICAL DISPLAY UNITS

**SINGLE SIDED
24" DISPLAY - 72 BINS**

Parts required
(1) MD-WMF24
(1) MD-FSK24
(12) TOB6
(1) MD-TOB-MS
(1) MD-TOB-CN
Width 24"
Height 67"
Depth 10-7/8"

**SINGLE SIDED
48" DISPLAY - 144 BINS**

Parts required
(2) MD-WMF24
(2) MD-FSK24
(1) MD-FSC48
(24) TOB6
(2) MD-TOB-MS
(2) MD-TOB-CN
Width 48"
Height 67"
Depth 10-7/8"

**DOUBLE SIDED
24" DISPLAY - 144 BINS**

Parts required
(2) MD-WMF24
(2) MD-FSK24
(24) TOB6
(2) MD-TOB-MS
(2) MD-TOB-CN
Width 24"
Height 67"
Depth 21-7/8"

**DOUBLE SIDED
48" DISPLAY - 288 BINS**

Parts required
(4) MD-WMF24
(4) MD-FSK24
(1) MD-FSC48
(48) TOB6
(4) MD-TOB-MS
(4) MD-TOB-CN
Width 48"
Height 67"
Depth 21-7/8"

NOTE: All parts are sold separately and shipped unassembled.

FREE STANDING SLIDER CABINET

This system features four individual panels filled with tip out bins of which two are fixed to the back side and two slide easily from left to right allowing free access to all four panels. Manufactured of tough 14 guage steel with putty powder coat finish. This slider unit can hold up to as many as 336 bins depending on the size of bin selected. Build your own custom display using 9, 6, 5, 4, 3 horizontal bin units.



PART NO.	HEIGHT	WIDTH	DEPTH
FLOOR STAND DISPLAY - SINGLE SIDED			
MD-FSGC48	66-1/4"	48"	16"

For complete ordering information, please call your Inside Sales Representative.