



FROST PROOF YARD HYDRANTS

- Provides running water for livestock, lawn and garden
- Stainless steel operating rod
- All water drains from pipe after closing
- Tough cast iron head and handle
- All bolts stainless steel for longer life
- Max Pressure 125 PSI
- Max Temperature 120°F
- Double o-ring sealing system
- Frost Free, valve operates below frost line
- Install anywhere with pressurized water supply
- One piece molded plunger


PART NO.	UPC 777808+	LIST PRICE-A	BURY LENGTH	OVERALL LENGTH	WEIGHT (LBS)
3/4" FPT Inlet					
PE-YH07-01	314973	\$ 83.97	1'	45"	12.91
PE-YH07-02	314980	87.49	2'	57"	14.95
PE-YH07-03	314997	91.29	3'	69"	16.99
PE-YH07-04	315000	94.76	4'	81"	19.03
PE-YH07-05	315017	98.33	5'	93"	21.07
PE-YH07-06	315024	101.80	6'	105"	23.11
PE-YH07-07	315031	105.94	7'	117"	25.15
PE-YH07-08	315048	109.07	8'	129"	27.19
PE-YH07-10	315055	116.15	10'	153"	31.27

1" FPT Inlet					
PE-YH10-01	315154	96.19	1'	45"	13.05
PE-YH10-02	315161	100.04	2'	57"	15.09
PE-YH10-03	315178	104.20	3'	69"	17.13
PE-YH10-04	315185	107.99	4'	81"	19.17
PE-YH10-05	315192	111.89	5'	93"	21.21
PE-YH10-06	315208	115.69	6'	105"	23.25
PE-YH10-07	315215	120.22	7'	117"	25.29
PE-YH10-08	315222	123.64	8'	129"	27.33
PE-YH10-10	315239	131.39	10'	153"	31.41

NOTE: Also available in boxed sets

VALVE BODY

PART NO.	UPC 777808+	DESCRIPTION	LIST PRICE-A	DIAGRAM REFERENCE NO.
PE-13YH-HA	314942	YARD HYDRANT HEAD ASSEMBLY - RED (COMPLETE)	\$ 52.83	
PE-13YH-H01	315420	Head Casting - Red	37.85	A
PE-13YH-H02	315437	Lever Casting - Red	11.01	B
PE-YH-RK		HYDRANT REPAIR KIT Includes the following: Zinc plated draw strap colorized (2) 1" Zinc plated pivot connector (1) 5/16" -18 UNC x 3/4" 18.8 Stainless Steel Set Screw (1) 3/4" Brass Packing Nut (1) #204 O-Ring Nitrile Buna N (2) Bronze & Rubber Plunger Complete (1)	13.13	
13YH-VB07		3/4" Bronze Valve Body	20.07	O
13YH-VB10		1" Bronze Valve Body	24.71	O
13YH-PO1		Bronze & Rubber Plunger Complete	4.49	N
13YH-H03		3/8" Steel Coupling	2.32	C
13YH-H04		3/8" Stainless Steel Operating Rod	3.62	D
13YH-H05		#204 O-Ring Nitrile Buna N (2)	1.80	E
13YH-H06		3/4" Brass Packing Nut	2.18	F
13YH-H07		1" Zinc Plated Steel Pivot Connector	2.83	G
13YH-H08		5/16" -18 UNC x 3/4" 18.8 Stainless Steel Set Screw	2.64	H
13YH-H09		Zinc Plated Steel Draw Strap-Colorized (2)	2.99	I
13YH-H10/11		1/4"-20 UNC X 1 3/4" 18.8 Stainless Steel Lever Bolt and 1/4"-20 UNC Nylon Locking Nut	1.92	
13YH-H12		3/4" -14 NPT Brass Hose Bibb Adapter	2.56	L
13YH-H13		5/16" -18 UNC x 3/4" Thumb Bolt	1.76	M

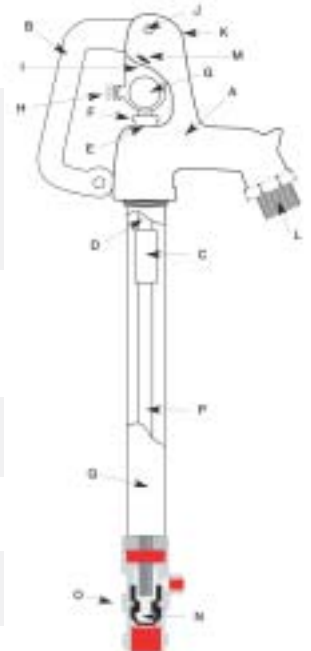

NOTE: Replacement parts for Merrill Hydrants are still available. Contact your Sales Rep for information.
 Pricing subject to change. Please confirm pricing with your Sales Rep.



3/4" FROST PROOF YARD HYDRANTS

- Install anywhere with pressurized water supply
- Provides running water for livestock, lawn and garden
- Double o-ring sealing system
- Replacement o-ring's interchangeable with Bll yard hydrant
- Frost Free, valve operates below frost line
- All water drains from pipe after closing

PART NO.	UPC 777808+	LIST PRICE-A	BURY LENGTH	OVERALL LENGTH	WEIGHT (LBS)
3/4" FPT Inlet					
PEYH-01	347018	\$ 55.75	1'	39.25"	11.00
PEYH-02	347025	58.66	2'	51.25"	12.50
PEYH-03	347032	62.57	3'	63.27"	14.25
PEYH-04	347049	68.64	4'	75.28"	16.37
PEYH-05	347056	75.33	5'	87.28"	18.94
PEYH-06	347063	78.20	6'	99.30"	20.00
PEYH-08	347070	88.70	8'	123.30"	23.15

HYDRANT REPAIR KIT

PEYH-IRK 357260 \$ 15.02

HYDRANT REPAIR KIT Includes the following:

- Draw Straps(2)
- Pivot Connector
- Hex bolt and nut for Handle
- Brass Packing Nut
- Buna "O" Rings
- Bronze & Rubber Plunger



PUMPTROL® WATER PUMP PRESSURE SWITCHES

PART NO.	UPC 777808+	LIST PRICE-A	CONNECTION/DESCRIPTION	CASE QTY
PE-FSG2	154586	\$ 29.99	1/4" FPT - Standard duty	20
PE-FSG2M4	154593	37.98	1/4" FPT - Low pressure cut-off standard duty	8
PE-FSG2P	213580	34.10	1/4" FPT - Pulsation plug standard duty	20
PE-FSG9	154609	33.19	1/4" MPT - Standard duty	20
PE-FSG9P	213634	34.10	1/4" MPT - Pulsation plug - Standard duty	20
PE-FSG10	154616	33.19	Mini Barb - Standard duty	20
PE-FSG14	154623	33.19	1/4" Barb - Standard duty	20
PE-FYG2	215256	52.38	1/4" FPT - Medium Duty	20
PE-GSG2	215263	119.13	1/4" FPT - Nema/General purpose	20

ELECTRICAL RATINGS FOR PUMPTROL SWITCHES SINGLE PHASE AC

SWITCH TYPE	115 VOLT	230 VOLT
TYPE FSG	1 1/2 HP	2 HP
TYPE FYG	2HP	3HP
TYPE GSG	2HP	3HP

NOTE: All pressure switches can be field adjusted by following instructions inside switch cover. Standard setting is 30-50 PSI. For 20-40 PSI setting add A to Part Number.



PLUMBEEZE WATER PUMP PRESSURE SWITCHES

- Includes 1/4" tube fitting

PART NO.	UPC 777808+	LIST PRICE-A	CONNECTION/DESCRIPTION	CASE QTY
PE-PS2	317462	\$ 17.99	1/4" FPT Pressure Switch	20
PE-PS2LP	317479	23.95	1/4" FPT Low Pressure Cut-Off	20

ELECTRICAL RATINGS FOR PLUMBEEZE SWITCHES 2 Pole HP Ratings

Volts	1Ø (Phase)	A
115	1.5	20
230	2	12

TYPE 1 enclosure for indoor use only

NOTE: All pressure switches can be field adjusted by following instructions inside switch cover. Standard setting is 30-50 PSI.



PE-PA100



PE-PA125100

BRONZE PITLESS ADAPTERS

Pitless adapters provide an underground connection from the pump discharge inside the well to the pressure system supply line. Single pipe pitless adapters can be used with submersible pumps or shallow well jet pumps. Double pipe units can be used with deep well jet pumps. Pitless adapter systems are more sanitary than well pits and are quicker and easier to install.

Plumbeeze Pitless Adapter Features:

- High quality bronze construction
- Compact design
- Rubber "O" rings
- Chamfer slide for easy installation
- Supports 2000 lb working load

PART NO.	UPC	LIST PRICE-A	SIZE	CASING SIZE	WORKING LOAD-lbs	SHIPPING WGT-lbs	CASE QTY
PE-PA100	116720	\$ 50.75	1"	5" - 12"	2000	2.95	16
PE-PA125	116737	94.39	1 1/4"	5" - 12"	2000	4.90	8
PE-PA125100	214143	185.19	1 1/4" x 1"	4" - 12"	2000	8.60	8



PLUMBEEZE CONDUIT CAPS - ALUMINUM

- Stainless steel set screws
- 136 aluminum alloy
- Fitted for 1" conduit

PART NO.	UPC	LIST PRICE-A	CASING SIZE (IN)		CASE WGT-lbs	CASE QTY
			I.D.	O.D.		
PE-CC4	309924	\$ 14.25	4"	4 1/2"	21	20
PE-CC5	152797	26.46	5"	5 1/2"	20	15
PE-CC6	152803	18.25	6"	6 5/8"	20	10
PE-CC8	309931	58.84	8"	8 5/8"	13	5



VERMIN PROOF CAPS

- Stainless steel nuts and bolts
- 135 aluminum alloy
- 1" NPT for conduit pipe
- 1/2" vent with stainless steel screen

PART NO.	UPC	LIST PRICE-A	CASING SIZE (IN)		CASE WGT-lbs	CASE QTY
			I.D.	O.D.		
PE-VPCC5	221981	\$ 39.90	5"	5 9/16"	27	10
PE-VPCC6	221547	39.90	6"	6 5/8"	30	10



6" WATERTITE CAST IRON CAP

- Rugged cast iron body
- Wide gasket provides positive watertight seal
- Screen vent factory installed
- Blue colour for easy site location
- Packaged individually
- Fits 6 5/8" O.D. (6", 6 1/4" I.D.) Well Casing
- For 1" conduit


PART NO.	UPC	LIST PRICE-A	CASING SIZE (IN)		CONDUIT PIPE	CASE QTY
			I.D.	O.D.		
PE-WTCC6-CI	221530	\$ 36.22	6, 6 1/4	6 5/8	1" FPT	5



6" WATERTITE MIRACLE ALUMINUM LOCKING WELL CAP

- Easy to install, easy access for maintenance
- Vermin proof with large screened air vents
- Stainless steel hardware
- O-ring system to ensure reliable seal to casing
- A second O-ring is used to seal cover and retainer ring, a positive compression seal is achieved by tightening a single set screw on a specially designed tapered surface ensuring a positive seal
- Locking feature provides a secure/tamper-proof installation
- Grounding terminal with bolt provided
- A well log is provided inside each cap to record installation data/specifications

PART NO.	UPC	LIST PRICE-A	CASING SIZE (IN)		CONDUIT CONNECTION	AIR VENTS	UNIT WGT-lbs	CASE QTY
			I.D.	O.D.				
PE-WTMLC-A06	366323	\$ 44.53	6"	6 5/8"	1" FPT	(2) 3/4"	4.0	12

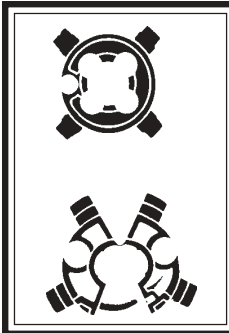

CABLE GUARDS

- Cable guards will keep the power cable from abrading against the well casing
- Minimum of 3 should be used per system; one at the pump, one a max. of 15 ft. above the pump and one about 25 to 35 ft. above the pump
- Furnished in 6" size, tabs can be cut off to fit 4" and 5" well casing also

PART NO.	UPC 777808+	LIST PRICE-A	MODEL	DROP PIPE	UNIT WEIGHT	CASE QTY
UWG-6	215164	\$ 1.32	Snap-In	1 & 1 1/4	1.5 oz	48
UWG-100	215171	2.17	Self-Clamping	1	2.0 oz	48
UWG-125	215188	2.94	Self-Clamping	1 1/4	2.0 oz	48

Snap-in Cable guard (UWG-6) will fit 1" & 1 1/4" drop pipe while the self-clamping cable guards UWG-100 will only fit 1" pipe and UWG-125 will only fit 1 1/4" pipe.



WELL SEAL - SINGLE DROP PIPE - SUBMERSIBLE PUMP

PART NO.	UPC 777808+	LIST PRICE-A	WELL SIZE I.D.	DROP PIPE SIZE	VENT SIZE	CONDUIT SIZE	WGT lbs	CASE QTY
PE-WS3510	311699	\$ 61.73	3 1/2"	1"	1/2"	1/2"	3	1
PE-WS4010	311712	21.82	4"	1"	1/2"	3/4"	4 1/4	1
PE-WS4012	311729	21.52	4"	1 1/4"	1/4"	3/4"	4	1
PE-WS5010	311743	27.10	5"	1"	1/2"	1"	7	1
PE-WS5012	311750	26.76	5"	1 1/4"	1/2"	3/4"	6	1
PE-WS6010	311774	32.67	6"	1"	1/2"	1"	10	1
PE-WS6012	311781	32.90	6"	1 1/4"	1/2"	1"	9	1
PE-WS6210	311804	33.49	6 1/4"	1"	1/2"	1"	10 1/2	1
PE-WS6212	311811	32.80	6 1/4"	1 1/4"	1/2"	1"	9	1

Other sizes and well seal modification available, please call for information and pricing.



WELL SEAL - DOUBLE HOLE - JET PUMP

PART NO.	UPC 777808+	LIST PRICE-A	WELL SIZE I.D.	DROP PIPE SIZE	VENT SIZE	WGT lbs	CASE QTY
PE-WS351210	311705	\$ 59.10	3 1/2"	1 1/4" x 1"	1/2"	3	1
PE-WS401210	311736	21.31	4"	1 1/4" x 1"	1/2"	3 1/2	1
PE-WS501210	311767	26.55	5"	1 1/4" x 1"	1/2"	6 1/4	1
PE-WS601210	311798	31.88	6"	1 1/4" x 1"	1/2"	9 1/2	1
PE-WS621210	311828	32.76	6 1/4"	1 1/4" X 1"	1/2"	9 3/4	1

Other sizes and well seal modification available, please call for information and pricing.



WELL SEAL - PLASTIC - SINGLE

PART NO.	UPC 777808+	LIST PRICE-A	WELL SIZE I.D.	DROP PIPE SIZE
PE-WSP4010	242085	\$ 19.42	4"	1"
PE-WSP4012	242092	19.28	4"	1 1/4"
PE-WSP5010	242115	20.98	5"	1"
PE-WSP5012	242122	21.08	5"	1 1/4"
PE-WSP6010	242139	21.69	6"	1"
PE-WSP6012	242146	22.81	6"	1 1/4"
PE-WSP6210	242153	22.87	6 1/4"	1"
PE-WSP6212	242160	22.81	6 1/4"	1 1/4"

WELL SEAL - PLASTIC - DOUBLE HOLE

PART NO.	UPC 777808+	LIST PRICE-A	WELL SIZE I.D.	DROP PIPE SIZE
PE-WSP401210	242177	\$ 18.07	4"	1 1/4" X 1"
PE-WSP501210	242184	19.61	5"	1 1/4" X 1"
PE-WSP601210	242191	21.99	6"	1 1/4" X 1"
PE-WSP621210	242207	21.99	6 1/4"	1 1/4" X 1 1/4"



GROMET KIT

PART NO.	UPC 777808+	DESCRIPTION	LIST PRICE-A
PE-WSGK07	311675	3/4" Wire hole gromet kit	\$ 3.48
PE-WSGK10	311682	1" Wire hole gromet kit	3.61

Pricing subject to change. Please confirm pricing with your Sales Rep.



HEAT SHRINK SPLICE KITS

PLUMBEEZE adhesive lined flexible cross-linked polyolefin heat shrinkable tubing is designed for the new smaller O.D. lead wires being used on submersible pump motors. The tubing provides excellent waterproof insulating and environmental sealing protection for splices, connections and jacket repairs on applications up to 600 volts. With high impact and abrasion resistance the tubing provides the highest level of mechanical durability. When heated above 120°C (250°F) the tubing shrinks rapidly to a skin tight fit, forcing the melted adhesive to flow forming a flexible bond. Upon cooling the adhesive solidifies, forming a permanent, non-drying flexible water proof barrier.

FAST RECOVERY HEAT SHRINK KITS

With a 4:1 shrink ratio the tubing shrinks unrestricted to 25% of its original diameter. The recovered wall thickness of the tubing is proportional to the degree of recovery, approx. 0.043"/1.1 mm when fully recovered. This tubing will shrink to its fully recovered diameter in 25-30 seconds. Time will vary depending on job site conditions and the heat source that is used.

Tube specs.-expanded I.D.=0.45" min.-recovered I.D.=0.102" max.-nominal wall thickness=0.043"

BLACK KIT PART NO.	UPC 777808+	LIST PRICE-A	WIRE SIZE RANGE	NO. OF BUTT CONN.	NO. OF SHRINK TUBES	TUBE LENGTH	CTN/CASE QUANTITY
PE-HS2	155323	\$ 3.01	14,12,10	2(#14-#10)	2	3"	10/100
PE-HS3	155330	3.83	14,12,10	3(#14-#10)	3	3"	10/100
PE-HS3-4	274550	4.23	14,12,10	4(#14-#10)	3	3"	10/100
PE-HS4	155347	4.96	14,12,10	4(#14-#10)	4	3"	10/100

HEAVY DUTY HEAT SHRINK KITS

With a 3:1 shrink ratio the tubing shrinks unrestricted to 33% of its original diameter. The recovered wall thickness of the tubing is proportional to the degree of recovery, approx. 0.08"/2mm when fully recovered. Due to the substantial wall thickness, the tubing takes longer to shrink to its fully recovered state, approx. 45-50 seconds. Time will vary depending on job site conditions and the heat source that is used.

Tube specs.-expanded I.D.=0.51" min.-recovered I.D.=0.16" max.-nominal wall thickness=0.09"

BLACK KIT PART NO.	UPC 777808+	LIST PRICE-A	WIRE SIZE RANGE	NO. OF BUTT CONN.	NO. OF SHRINK TUBES	TUBE LENGTH	CTN/CASE QUANTITY
PE-HS8-4	214068	\$ 27.24	#8 AWG	3 (#8) & 1(#14-#10)	4	4"	10/100
PE-HS6-4	214075	32.86	#6 AWG	3 (#6) & 1(#8)	4	4"	10/100

NOTE: Black tubing is flame retardant.

Large diameter tubing and butt splice connectors sold separately.



ELECTRICAL TAPE

- General all purpose black plastic vinyl tape
- Rated for continuous operation in the temperature range from 14°F to 194°F (-10°C to 90°C)
- Meets CSA approval


PART NO.	DESCRIPTION	LIST PRICE-A	TEMP. RANGE	SIZE	CTN/CASE QTY
ETAW	General purpose vinyl plastic electrical tape	\$ 1.13	-10°C to 90°C 14°F to 194°F	18mm x 18.3m x .18mm	10/250



STANDARD TEFLON® TAPE

- Use for water (potable & non-potable), most chemicals, oxygen, gas, hydraulic and high pressure lines
- Temperature Range: -374°F (-190°C) to +536°F (+280°C)
- Elongation: minimum of 50%
- 100% Virgin teflon®
- Meets or exceeds Mil. Spec. T-27730A

PART NO.	LIST PRICE-A	SIZE	THICKNESS	DENSITY	CTN/CASE QUANTITY
PE-TST520	\$ 0.40	1/2" X 520"	0.0035" (3.4 mils)	0.35g/cm³	10/500

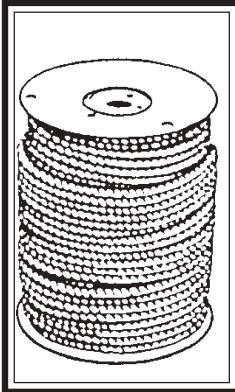

BLUE & WHITE BRAIDED POLYPROPYLENE ROPE

- 100% monofilament fibers
- Floats on water, retains strength when wet, and may be stored wet without damage
- Lightweight flexibility
- High resistance to abrasion, mildew, oil, grease, gasoline, marine growth, and many chemicals
- Best for tie-downs, utility hand lines, pulling lines, ladder lines, marine uses

PART NO.	LIST PRICE-A	DIA. INS	LENGTH	REEL	LBS/ REEL	TENSILE STRENGTH
SRPB-1/4	\$ 63.24	1/4"	1000 Ft	Plastic	9.5	1000 lbs
SRPB-1/4-3000	181.14	1/4"	3000 Ft	Plastic	30.0	1000 lbs
SRPB-1/4-500	32.30	1/4"	500 Ft	Plastic	5.0	1000 lbs

YELLOW TWISTED 3 STRAND POLYPROPYLENE ROPE

SRPT-1/4	\$ 92.83	1/4"	1300 Ft	Plastic	14.4	1120 lbs
SRPT-5/16	92.83	5/16"	975 Ft	Plastic	14.8	1450 lbs
SRPT-3/8	92.83	3/8"	630 Ft	Plastic	15.8	2250 lbs
SRPT-1/2	92.83	1/2"	335 Ft	Plastic	16.3	4200 lbs
SRPT-5/8	92.83	5/8"	200 Ft	Plastic	16.7	5900 lbs



SUPER-TIE ROPE HANGER


PART NO.	UPC 777808+	LIST PRICE-A	FITS CASINGS	ACCEPTS ROPE	WEIGHT	CTN/CASE QTY
USTRH-6	214686	\$12.31	6" & 6 1/4" I.D.	1/4" - 3/8"	1.30 lb	5/40



SUBMERSIBLE TORQUE ARRESTORS

- Precision molded to exacting specifications
 - Protects submersible pumps from starting torque damage
 - Snug fit in all well casings from 4" to 8" I.D.
 - Two piece design installs quickly
 - Eliminates flashing problems
 - Securely fasten to 1" or 1 1/4" drop pipe with the stainless steel clamps provided
- SPECIAL FEATURE:** Infinite adjustment feature enables installer to obtain proper fit, eliminating damage to pumps due to high starting torque.

PART NO.	UPC 777808+	LIST PRICE-A	COLOUR	CASING SIZE	DROP PIPE SIZE	UNIT WGT	CASE QTY
PE-TA	116744	\$ 12.99	Black	4" To 8"	1" To 1 1/4"	1.0 lb	6

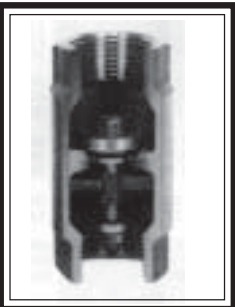

CAST BRASS CHECK VALVE

- Cast brass body and poppet
- NBR "O" Ring seal (Nitrile Buna-N)
- Temperature Max. 180°F (80°C)
- Pressure Max. 200 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	WGT lbs	CTN/CASE QUANTITY
PE-CV050	116614	\$ 5.61	1/2"	0.50	10/100
PE-CV075	116621	7.89	3/4"	0.50	10/80
PE-CV100	116638	11.13	1"	0.75	10/60
PE-CV125	116652	16.61	1 1/4"	1.25	5/40
PE-CV150	116669	20.41	1 1/2"	1.50	5/30
PE-CV200	116645	35.94	2"	2.75	5/20



BRONZE CHECK VALVE


- Cast bronze body and poppet
- NBR "O" Ring Seal (Nitrile Buna-N)
- Temperature Max. 180°F (80°C)
- Pressure Max. 200 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	WGT lbs	CTN/CASE QUANTITY
PECVB-075	255191	\$ 13.65	3/4"	0.50	10/80
PECVB-100	255207	18.13	1"	0.75	10/60
PECVB-125	255214	26.38	1 1/4"	1.25	5/40
PECVB-150	255221	30.65	1 1/2"	1.50	5/30
PECVB-200	255238	53.17	2"	2.75	5/20
PECVB-300	255245	193.77	3"	8.50	20
PECVB-400	255252	423.04	4"	17.75	20



BRONZE CHECK VALVE

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
PE-CV125100	267774	\$ 21.19	1 1/4" MPT X 1" FPT	10/60



STAINLESS STEEL CHECK VALVE

- #304 Stainless Steel body
- #304 Stainless Steel poppet
- Viton "O" Ring seal
- Temperature Max. 180°F (80°C)
- Pressure Max. 200 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CASE QTY
PECVSS-050	307227	\$ 16.47	1/2"	20
PECVSS-075	307234	19.72	3/4"	20
PECVSS-100	307241	25.23	1"	20
PECVSS-125	307258	35.41	1 1/4"	20
PECVSS-150	307265	46.31	1 1/2"	20
PECVSS-200	307272	75.95	2"	20
PECVSS-300	307289	314.23	3"	1
PECVSS-400	307296	314.23	4"	1
PECVSSMF-125-100	307302	28.72	1 1/4" M X 1" F	20



SWING CHECK VALVE

- Max. Working Pressure 200 PSI water, oil & gas (Cold water, non-shock)
- Cast bronze body, disc and cap
- Brass rod pin and screw
- Max. Working Temperature 100°C
- Threads to ANSI B2.1
- CxC to ANSI B16.18

PART NO. IPS	UPC 777808+	LIST PRICE-A	PART NO. CXC	UPC 77808+	LIST PRICE-A	SIZE	CTN/CASE QUANTITY
U08060311	241774	\$ 7.85	U08060312	255269	\$ 8.06	1/2"	10
U08060411	241781	10.01	U08060412	255276	10.20	3/4"	10
U08060511	255344	13.29	U08060512	255283	13.56	1"	10
U08060611	255351	20.40	U08060612	255290	20.80	1 1/4"	10
U08060711	255368	25.87	U08060712	255306	26.44	1 1/2"	5/30
U08060811	255375	37.46				2"	2/24
U08060911	255382	81.47				2 1/2"	10
U08061011	255399	108.46				3"	8
U08061111	255405	175.02				4"	6



CAST BRASS FOOT VALVE

- Cast brass body and poppet
- Stainless steel screen
- NBR "O" Ring seal (Nitrile Buna-N)
- Temperature Max. 180°F (80°C) Pressure Max. 200 PSI


PART NO.	UPC 777808+	LIST PRICE-A	SIZE	WGT lbs	CTN/CASE QUANTITY
PE-FV050	213900	\$ 7.55	1/2"	0.25	10/80
PE-FV075	116676	7.59	3/4"	0.50	10/80
PE-FV100	116683	10.44	1"	0.50	10/60
PE-FV125	116706	13.37	1 1/4"	1.00	5/40
PE-FV150	116713	18.03	1 1/2"	1.50	5/30
PE-FV200	116690	30.54	2"	2.25	5/20



BRONZE FOOT VALVE

- Cast bronze body and poppet
- Stainless steel screen
- NBR "O" Ring seal (Nitrile Buna-N)
- Temperature Max. 180°F (80°C) Pressure Max 200 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	WGT lbs	CTN/CASE QUANTITY
PEFVB-050	255412	\$ 9.49	1/2"	0.25	10/80
PEFVB-075	255429	11.42	3/4"	0.50	10/80
PEFVB-100	255436	15.96	1"	0.50	10/60
PEFVB-125	255443	22.24	1 1/4"	1.00	5/40
PEFVB-150	255450	33.01	1 1/2"	1.50	5/30
PEVFB-200	255467	45.99	2"	2.25	5/20
PEVFB-300	255474	156.12	3"	2.25	8
PEFVB-400	255481	260.99	4"	13.50	4

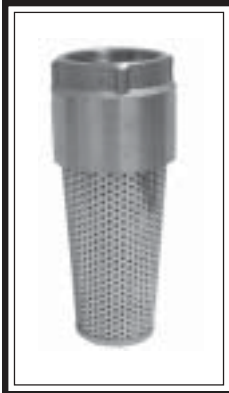

STAINLESS STEEL FOOT VALVE

- #304 Stainless steel body and poppet
- #304 Stainless steel screen
- Viton "O" Ring seal
- Temperature Max 180°F (80°C) Pressure Max. 200 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	CASE QTY
PEFVSS-050	307319	\$ 19.23	1/2"	20
PEFVSS-075	307326	23.41	3/4"	20
PEFVSS-100	307333	28.94	1"	20
PEFVSS-125	307340	40.04	1 1/4"	20
PEFVSS-150	307357	53.73	1 1/2"	12
PEFVSS-200	307364	83.77	2"	12
PEFVSS-300	307371	275.17	3"	8
PEFVSS-400	307388	470.46	4"	4



MODEL 357 - CAST IRON FLAPPER FOOT

- Cast iron body and strainer
- Threaded female connection
- Hinged leather seat
- Temperature Max. 180°F (80°C) Pressure Max. 250 PSI

PART NO.	LIST PRICE-A	WGT lbs	VALVE LEATHER O.D.	SIZE
174964	\$ 73.90	6.0	4 1/4"	2"
174965	471.15	13.0	5"	2 1/2"
174966	148.88	13.0	5 5/8"	3"
174967	216.21	20.0	7"	4"
174968	1048.75	28.0	9"	5"
174969	455.39	45.0	9 3/4"	6"
174970	2638.59	99.0	12 7/8"	8"



MODEL SLC - BRADY PLASTIC CHECK VALVE

- Durable delrin polymer body / 316 Stainless Steel spring
- Delrin poppet c/w Nitrile (Buna-N) seal
- Not recommended for use in gasoline systems
- Tensile strength - Valves tested to exceed 2200 lbs.
- Burst pressure - Valves tested to exceed 1500 PSI
- Temperature Max. 180°F (80°C) Pressure Max. 175 PSI

PART NO.	UPC 777808+	LIST PRICE-A	ENTERS PIPE	SIZE	CASE QTY
U17SLC-075	237814	\$ 18.13	1 1/4"	3/4"	10
U17SLC-100	237739	19.35	1 1/2"	1"	10
U17SLC-125	231980	27.99	2"	1 1/4"	10
U17SLC-150	237746	33.64	2 1/2"	1 1/2"	10



PVC IN-LINE CHECK VALVE

- Durable PVC body / 304 Stainless Steel spring
- PVC poppet c/w EPDM seal
- 302 Stainless Steel bolt and washer
- Pressure Max 200 PSI
- Temp Max 140°F (60°C)

PART NO.	UPC 777808+	PART NO. SOCKET	UPC 777808+	LIST PRICE-A	SIZE	WGT lbs each	CTN/CASE QUANTITY
U1710-05	311569	U1710S-05	311613	\$ 5.34	1/2"	0.19	10/120
U1710-07	311583	U1710S-07	311620	5.70	3/4"	0.20	10/120
U1710-10	311576	U1710S-10	311637	7.82	1"	0.40	8/80
U1710-12	296873	U1710S-12	311644	10.04	1 1/4"	0.69	6/60
U1710-15	311590	U1710S-15	311651	10.35	1 1/2"	0.70	6/60
U1710-20	311606	U1710S-20	311668	12.30	2"	1.34	4/40



MODEL 193D - PLASTIC FOOT VALVE

- One piece acetal body & strainer
- Nylon 11 poppet
- Stainless steel spring
- Nitrile Buna-N seal
- Temperature Max 140°F (60°C) Pressure Max. 150 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	WGT oz	CASE QTY
PE-PFV030	255535	\$ 18.81	3/8"	0.5	10
PE-PFV050	255542	20.30	1/2"	0.5	10



PVC FOOT VALVE

- Injection molded PVC body and poppet with screen
- Durable 304 Stainless Steel spring for long lasting operation
- NBR Buna-N seal
- Alkali and acid resistant
- Every Foot Valve is pressure and leak tested
- Tapered screen for easier installation
- Threading: ANSI B1.20.1
- Temp Max 140°F (60°C)
- Pressure Max 150 PSI at 68°F(20°C)

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	ENTERS STANDARD SCHEDULE 40 PIPE SIZE	WGT lbs	CASE QTY
PE-PFV075	268047	\$ 5.20	3/4"	1 1/2"	34.17	10
PE-PFV100	268054	6.31	1"	2"	41.67	10
PE-PFV125	268061	10.32	1 1/4"	3"	41.67	10
PE-PFV150	255580	14.87	1 1/2"	3"	46.30	10
PE-PFV200	255597	18.55	2"	3"	46.30	10
PE-PFV250	307760	51.46	2 1/2"	5"	36.82	1
PE-PFV300	307791	67.44	3"	6"	41.89	1
PE-PFV400*	307784	118.16	4"	8"	14.33	1

BULKHEAD FLOAT VALVE ASSEMBLIES

Kit contains:

- Float valve, heavy duty bronze body c/w Buna-N disc
Rubber bulkhead gasket/brass nut
- 6" plastic float
- Brass float rod
- Maximum operating temperature rating 180°F (82°C)
- Maximum operating pressure rating 80 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	INLET	OUTLET	TAPPED
PE-FLVA-05B	314744	\$ 21.94	1/2"	1/2" SMT	Faucet	1/4" - 20 SAE
PE-FLVA-07B	314782	24.83	3/4"	3/4" SMT	Faucet	1/4" - 20 SAE

SMT = Straight Male Thread



FLOAT VALVE ASSEMBLIES

Kit contains:

- Heavy duty red brass float valve with threaded outlet
- 6" plastic float
- Brass float rod
- Maximum operating temperature rating 180°F (82°C)
- Maximum operating pressure rating 80 PSI

PART NO.	UPC 777808+	LIST PRICE-A	SIZE	INLET	OUTLET	TAPPED
PE-FLVA-03	314768	\$ 19.52	3/8"	3/8" MPT	3/8" MPT	1/4" - 20 SAE
PE-FLVA-05	314775	20.82	1/2"	1/2" MPT	1/2" MPT	1/4" - 20 SAE
PE-FLVA-07	314744	23.84	3/4"	3/4" MPT	3/4" MPT	1/4" - 20 SAE
PE-FLVA-10	314782	33.41	1"	1" MPT	1" MPT	1/4" - 20 SAE



REPLACEMENT PARTS

FLOATS

PART NO.	LIST PRICE-A	SIZE	TAPPED
28-BFVF-PL6	\$ 2.81	6"	1/4" - 20 SAE

RODS

- Brass SAE
- Male thread both ends

PART NO.	LIST PRICE-A	THREAD	LENGTH SIZE	FITS VALVE
28-BFVR-10	\$ 2.26	1/4" - 20 SAE	10"	3/8" Thru 1"
28-BFVR-12	2.62	1/4" - 20 SAE	12"	3/8" Thru 1"

FLOAT VALVE PARTS

LEVER ASSEMBLY		PLUNGER ASSEMBLY		REPL. SEAL KIT	
PART NO.	LIST PRICE-A	PART NO.	LIST PRICE-A	PART NO.	LIST PRICE-A
28-BFVP-LA0310 (For 3/8" - 1" Float Valve)	\$ 5.81	28-BFVP-PA0305 (For 3/8" - 1/2" Float Valve)	\$ 4.16	28-BFVP-SK0305 (For 3/8" - 1/2" Float Valve)	\$ 0.56
		28-BFVP-PA07 (For 3/4" Float Valve)	7.20	28-BFVP-SK07 (For 3/4" Float Valve)	0.68
		28-BFVP-PA10 (For 1" Float Valve)	9.42	28-BFVP-SK10 (For 1" Float Valve)	0.68



PRESSURE GAUGES

- Steel Case
- Accuracy: 3% - 2% - 3% Grade B
- Window: Glass
- Bourdon tube
- Application: General Purpose - not for use with oxygen
- Operating Temperature: 32°F-104°F(0°C-40°C)
- Connection: Brass

2" DIAL

PART NO.	UPC 777808+	LIST PRICE-A	RANGE PSI	INCREMENTS	CONNECTION TYPE	CASE QTY
PE-PGBM100	116775	\$ 4.38	0-100	1	1/8" CBM	100
PE-PGBM100-1	213566	5.47	0-100	1	1/4" CBM	100
PE-PGBM160-1	213573	5.47	0-160	2	1/4" CBM	100
PE-PGBM200-1	213641	5.47	0-200	2	1/4" CBM	100
PE-PG15	213658	4.99	0-15	0.5	1/4" LM	100
PE-PG30	213665	4.49	0-30	0.5	1/4" LM	100
PE-PG60	213672	4.49	0-60	1	1/4" LM	100
PE-PG100	116768	4.10	0-100	1	1/4" LM	100
PE-PG100-0	213689	4.49	0-100	1	1/8" LM	100
PE-PG160	213696	4.49	0-160	2	1/4" LM	100
PE-PG200	213702	4.49	0-200	5	1/4" LM	100
PE-PG300	213719	4.99	0-300	5	1/4" LM	100
PE-PG400	213726	4.99	0-400	5	1/4" LM	100

VACUUM GAUGE

PE-PGV30	213733	5.47	30-0 HG	0.5	1/4" LM	100
----------	--------	------	---------	-----	---------	-----

PLASTIC CASE ABS

PE-PGP30	229161	4.51	0-30	0.5	1/4"LM	100
----------	--------	------	------	-----	--------	-----

2 1/2" DIAL

PART NO.	UPC 777808+	LIST PRICE-A	DUAL RANGE PSI	kPa	INCREMENTS	CONNECTION TYPE	CASE QTY
PE-PG25-15	313976	\$ 5.80	0-15	0-100	0.2	1/4" LM	50
PE-PG25-30	313983	5.80	0-30	0-200	0.5	1/4" LM	50
PE-PG25-60	313990	5.80	0-60	0-400	1	1/4" LM	50
PE-PG25-100	314003	5.80	0-100	0-700	1	1/4" LM	50
PE-PG25-160	314010	5.80	0-160	0-1100	2	1/4" LM	50
PE-PG25-200	314027	5.80	0-200	0-1400	2	1/4" LM	50
PE-PG25-300	314014	5.80	0-300	0-2100	5	1/4" LM	50
PE-PG25-400	314041	5.80	0-400	0-2800	5	1/4" LM	50
PE-PG25-600	314058	5.80	0-600	0-4000	10	1/4" LM	50

CONTRACTOR PRESSURE GAUGES - 4 1/2" DIAL

- Application: Fluid medium which does not clog connection or corrode copper alloy
- #304 Stainless Steel case and bezel
- Accuracy: +/- 1.0% Full Scale Value
EXCEPTION - 3000 and 5000 PSI Gauge +/- 2.0% Full Scale Value
- 4 1/2" Dial Face
- Window: Clear Acrylic Plastic
- Connection: Copper Alloy
- Readjustable Pointer
- Gauges 15 to 600 PSI tapped for restrictor screw (not included)
- Gauges of 1000 PSI or more tapped and supplied with a restrictor screw
- Operating Temperatures: Ambient: -13°F to 140°F(-25°C to 60°C) Media: Max. 140°F (60°C)
- Bourdon Tube

PART NO.	LIST PRICE-A	DUAL RANGE PSI	kPa	INCREMENTS	CASE QTY
1/4" LM					
PG45-15	\$ 16.00	0-15	0-100	0.2	20
PG45-30	16.00	0-30	0-200	0.5	20
PG45-60	16.00	0-60	0-400	1	20
PG45-100	16.00	0-100	0-700	1	20
PG45-160	16.00	0-160	0-1100	2	20
PG45-200	16.00	0-200	0-1400	2	20
PG45-300	16.00	0-300	0-2000	5	20
PG45-400	16.00	0-400	0-2800	5	20
PG45-600	16.00	0-600	0-4000	10	20
PG45-1000	16.53	0-1000	0-7000	10	20
PG45-3000	16.53	0-3000	0-20000	50	20
PG45-5000	17.06	0-5000	0-35000	50	20



PRESSURE GAUGE - 2" DIAL - LIQUID FILLED

- Black Steel Case
- Window: Clear Acrylic Plastic
- 3-2-3% Accuracy
- Application: General Purpose - not for use with oxygen
- 2" Dial Face
- 1/4" MPT Lower Mount Brass Connection
- Copper Alloy Internals

PART NO.	UPC 777808+	LIST PRICE-A	RANGE PSI	CASE QTY
PE-PG-30G	276370	\$ 7.82	0-30	100
PE-PG-60G	308095	7.82	0-60	100
PE-PG-100G	275038	7.82	0-100	100
PE-PG-160G	311835	7.82	0-160	100
PE-PG-200G	311842	7.82	0-200	100



PRESSURE GAUGES - 2 1/2" DIAL - LIQUID FILLED

- #304 Stainless Steel case
- Accuracy: 1.5% full scale value
- Connection: Copper alloy
- Gauges of 1000 PSI or more have a restrictor screw
- Operating Temperatures: Ambient: -4°F to 140°F (-20°C to 60°C) Media: Max. 140°F (60°C)
- Application: Where vibration or pressure pulsation occur
- Window: Clear polycarbonate lens
- Bourdon tube


2 1/2" DIAL 1/4" LM

PART NO.	UPC 777808+	LIST PRICE-A	DUAL RANGE PSI	kPa	INCRE- MENTS	CONN. TYPE	CASE QTY
PE-PG25-15G	252640	\$ 15.00	0-15	0-100	.2	1/4" LM	50
PE-PG25-30G	252657	15.00	0-30	0-200	.5	1/4" LM	50
PE-PG25-60G	252664	15.00	0-60	0-400	1	1/4" LM	50
PE-PG25-100G	252671	15.00	0-100	0-700	2	1/4" LM	50
PE-PG25-160G	252688	15.00	0-160	0-1100	2	1/4" LM	50
PE-PG25-200G	252695	15.00	0-200	0-1400	5	1/4" LM	50
PE-PG25-300G	252701	15.00	0-300	0-2100	5	1/4" LM	50
PE-PG25-400G	252718	15.00	0-400	0-2800	10	1/4" LM	50
PE-PG25-600G	252725	15.00	0-600	0-4000	10	1/4" LM	50
PE-PG25-1000G	252732	15.27	0-1000	0-7000	20	1/4" LM	50
PE-PG25-1500G	252749	15.27	0-1500	0-10000	20	1/4" LM	50
PE-PG25-2000G	252756	15.27	0-2000	0-14000	50	1/4" LM	50
PE-PG25-3000G	252763	15.27	0-3000	0-21000	50	1/4" LM	50
PE-PG25-4000G	252770	15.27	0-4000	0-28000	100	1/4" LM	50
PE-PG25-5000G	252787	15.27	0-5000	0-35000	100	1/4" LM	50
PE-PG25-10000G	252794	15.27	0-10000	0-70000	200	1/4" LM	50

2 1/2" DIAL 1/4" CBM

PART NO.	UPC 777808+	LIST PRICE-A	DUAL RANGE PSI	kPa	INCRE- MENTS	CONN. TYPE	CASE QTY
PE-PG25CBM-15G	252831	\$ 15.37	0-15	0-100	.2	1/4" CBM	50
PE-PG25CBM-30G	252848	15.37	0-30	0-200	.5	1/4" CBM	50
PE-PG25CBM-60G	252855	15.37	0-60	0-400	1	1/4" CBM	50
PE-PG25CBM-100G	252862	15.37	0-100	0-700	2	1/4" CBM	50
PE-PG25CBM-160G	252879	15.37	0-160	0-1100	2	1/4" CBM	50
PE-PG25CBM-200G	252886	15.37	0-200	0-1400	5	1/4" CBM	50
PE-PG25CBM-300G	252893	15.37	0-300	0-2100	5	1/4" CBM	50
PE-PG25CBM-400G	252909	15.37	0-400	0-2800	10	1/4" CBM	50
PE-PG25CBM-600G	252916	15.37	0-600	0-4000	10	1/4" CBM	50
PE-PG25CBM-1000G	252923	15.80	0-1000	0-7000	20	1/4" CBM	50
PE-PG25CBM-1500G	252930	15.80	0-1500	0-10000	20	1/4" CBM	50
PE-PG25CBM-2000G	252947	15.80	0-2000	0-14000	50	1/4" CBM	50
PE-PG25CBM-3000G	252954	15.80	0-3000	0-21000	50	1/4" CBM	50
PE-PG25CBM-4000G	252961	15.80	0-4000	0-28000	100	1/4" CBM	50
PE-PG25CBM-5000G	252978	15.80	0-5000	0-35000	100	1/4" CBM	50
PE-PG25CBM-10000G	252985	15.80	0-10000	0-70000	200	1/4" CBM	50

IMPORTANT: Liquid Filled Gauges are sealed with a rubber plug to prevent leaking during shipment. Upon installation the tip of the plug must be cut off to allow the equalization of the internal gauge pressure to the atmospheric pressure. FAILURE TO DO SO WILL ADVERSELY EFFECT THE FUNCTION OF THE GAUGE.

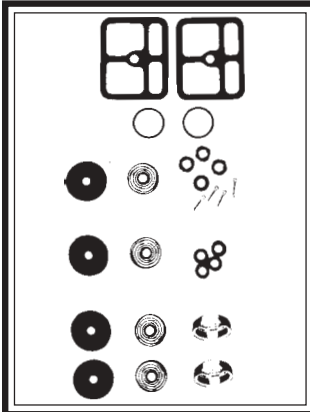

PISTON PUMP REPAIR KITS

FEATURES

- Genuine leather cup leathers
- High quality valve rubbers
- Top quality packing
- Rubber gaskets
- Stainless steel springs, cotter keys and washers

PART NO.	UPC 777808+	LIST PRICE-A	TO REPAIR PUMP	NO. OF CYLINDERS	CUP LEATHER SIZE	CASE QTY
PE-K255	154692	\$ 24.08	Duro Model K 255	1	1 3/8" X 5/8"	25
PE-K365	154708	24.52	Duro Model K 365	1	1 5/8" X 5/8"	25
PE-G125	154715	24.11	G.S.W. 300 1 1/4" Single	1	1 1/4" X 5/8"	25
PE-G150	214082	25.04	G.S.W. 300 1 1/2" Single	1	1 1/2" X 5/8"	25




HAND PUMP

FEATURES

- Recommended for shallow pump applications
- Easily installed
- Dark green hard enamel paint finish
- 15 3/4" High
- 3" I.D. Cylinder barrel
- Depth rating 30 feet
- Made of heavy cast iron
- Has open spout
- Tapped for 1 1/4" drop pipe
- 15 Lbs


PART NO.	UPC 777808+	LIST PRICE-A	DESCRIPTION	CASE QTY
PE-HP	116607	\$ 60.87	Hand Pump	1
PE-HPK3	215737	12.61	Hand Pump Repair Kit Includes 3" O.D. Cup Leather and 3 1/2" O.D. Valve Leather Fits Pumps with 3" diameter cylinder	

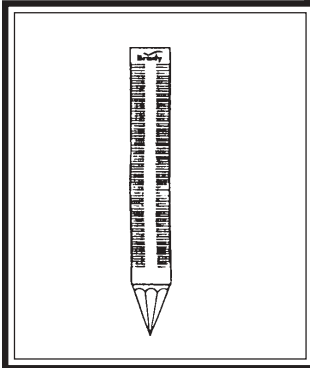

BRADY PVC BLUE POINTS (1 1/4", 1 1/2", 2")

Commonly used for small diameter shallow wells in residential, irrigation and water systems. While not recommended for hard driving, Blue Points can easily be washed down and then driven lightly into the water bearing sand or light gravel formation in a lake or stream, or in a bored, dug or drilled well. Additionally, points can act as a screen cap or plug to eliminate sand upheaval through the well bottom.


PART NO.	UPC 777808+	LIST PRICE-A	PIPE SIZE	LENGTH (FEET)	SHIPPING WGT-lbs	SLOT SIZE	CASE QTY
UBBP125-3	255740	\$ 17.03	1 1/4"	3	1.4	.010	24
UBBP125-4	255757	22.33	1 1/4"	4	1.8	.010	24
UBBP150-3	255771	20.68	1 1/2"	3	1.6	.010	20
UBBP150-5	255795	33.76	1 1/2"	5	2.7	.010	20
UBBP200-3	255801	23.57	2"	3	2.2	.010	12
UBBP200-4	255818	31.04	2"	4	2.9	.010	12
UBBP200-5	255825	38.57	2"	5	3.6	.010	12

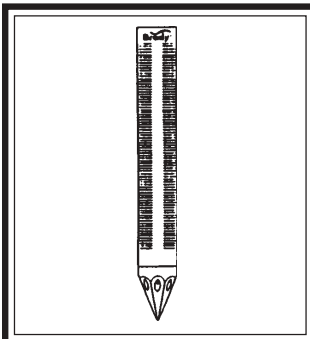

BRADY PVC JET POINTS (1 1/4", 1 1/2", 2")

Similar to Blue Points but offer the versatility and simplicity of being attached to a well screen, thus eliminating the added expense of a washdown valve and additional labour and material. Unique design allows for maximum fluid circulation and forceful jetting action. For rapid installation and development of a single well or multi-well monitoring and residential applications.

PART NO.	UPC 777808+	LIST PRICE-A	ACCEPTS GAL. PIPE	PIPE SIZE	LENGTH (FEET)	SHIPPING WGT-lbs	SLOT SIZE	CASE QTY
UBJP125-3	255832	\$17.67	1/2"	1 1/4"	3	1.4	.010	24
UBJP200-3	255894	25.89	1"	2"	3	2.3	.010	12

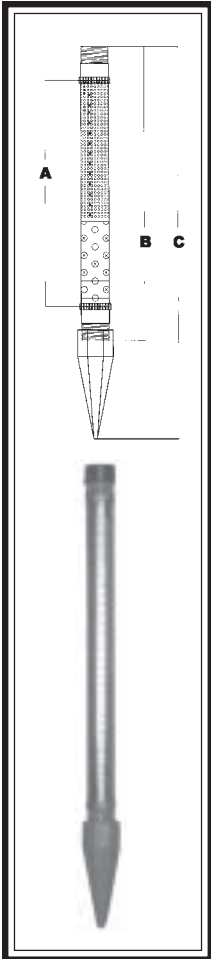

STAINLESS STEEL DRIVE WELL POINTS

- Rugged design with octagonal ductile iron head to prohibit turning in tough driving conditions
- Extendable in the field by removing head and coupling together with second well point for added capacity
- Bronze MIG weld top and bottom to prohibit screen shift or peeling
- Spotweld at 3/8" centers to prevent seam opening
- Stainless steel screen with 1/8" staggered perforations for maximum open area
- Available in 60-80-100 mesh stainless steel gauze for long life screening
- Solid steel columns running the entire length of the galvanized pipe ensuring structural integrity
- Individually boxed with 6 to a case

PART NO.	UPC 777808+	LIST PRICE-A	PIPE SIZE	SCREEN LENGTH-A	PIPE LENGTH-B	OVERALL LENGTH-C	MESH
UWP12-18-60M	275045	\$ 54.14	1 1/4"	18"	22"	27 1/2"	60
UWP12-18-80M	275052	54.14	1 1/4"	18"	22"	27 1/2"	80
UWP12-18-100M	275069	54.14	1 1/4"	18"	22"	27 1/2"	100
UWP12-24-60M	275076	61.47	1 1/4"	24"	28"	33 1/2"	60
UWP12-24-80M	275083	61.47	1 1/4"	24"	28"	33 1/2"	80
UWP12-24-100M	275090	61.47	1 1/4"	24"	28"	33 1/2"	100
UWP12-30-60M	275106	66.05	1 1/4"	30"	34"	39 1/2"	60
UWP12-30-80M	275113	66.05	1 1/4"	30"	34"	39 1/2"	80
UWP12-30-100M	275120	66.05	1 1/4"	30"	34"	39 1/2"	100
UWP12-42-60M	275137	77.95	1 1/4"	42"	46"	51 1/2"	60
UWP12-42-80M	275144	77.95	1 1/4"	42"	46"	51 1/2"	80
UWP12-42-100M	275151	77.95	1 1/4"	42"	46"	51 1/2"	100
UWP15-30-60M	275168	93.32	1 1/2"	30"	34"	40"	60
UWP15-30-80M	275175	93.32	1 1/2"	30"	34"	40"	80
UWP15-30-100M	275182	93.32	1 1/2"	30"	34"	40"	100
UWP20-30-60M	275199	102.79	2"	30"	34"	40"	60
UWP20-30-80M	275205	102.79	2"	30"	34"	40"	80
UWP20-30-100M	275212	102.79	2"	30"	34"	40"	100
UWP20-42-60M	275229	125.50	2"	42"	46"	52"	60
UWP20-42-80M	275236	125.50	2"	42"	46"	52"	80
UWP20-42-100M	275243	125.50	2"	42"	46"	52"	100

Slot size

.030 .020 .015 .012 .010 .009 .008 .007 .006



20 30 40 50 60 70 80 90 100

Mesh equivalent



DRIVE CAPS - BLACK

PART NO.	UPC 777808+	LIST PRICE-A	SIZE
U18-181	222070	\$ 4.88	1 1/4"
U18-182	275250	8.62	1 1/2"
U18-183	222094	11.14	2"



DRIVE COUPLINGS - GALVANIZED

PART NO.	UPC 777808+	LIST PRICE-A	SIZE
U18-184	222100	\$ 10.90	1 1/4"
U18-185	252176	20.16	1 1/2"
U18-186	2221117	16.00	2"



SOFT CUP LEATHERS

PART NO.	LIST PRICE-A
SMALL HOLE	
1/2" SMALL HOLE	
CLS114-5	4.05
CLS138-5	4.48
CLS112-5	4.48
5/8" SMALL HOLE	
CLS114	4.05
CLS138	4.48
CLS112	4.48
CLS158	4.69
LARGE HOLE	
CLS11316	5.12
CLS2	5.97
CLS214	6.82
CLS212	7.25
CLS3	9.38
CLS312	11.30

PART NO.	LIST PRICE-A	LG. HOLE SIZE	SIZE O.D.	CTN QTY
			1 1/4"	12
			1 3/8"	12
			1 1/2"	12
			1 5/8"	12
CLS11116-L	4.69	1"	1 11/16"	12
CLS11316-L	5.12	1 3/16"	1 13/16"	12
CLS2-L	5.54	1 1/4"	2"	12
CLS214-L	6.82	1 1/2"	2 1/4"	12
CLS212-L	7.25	1 5/8"	2 1/2"	12
CLS3-L	9.38	2"	3"	12
CLS312-L	11.30	2 1/2"	3 1/2"	12
CLS4-L	14.29	3"	4"	12



VALVE LEATHERS

PART NO.	LIST PRICE-A	LEATHER SIZE OUTSIDE DIA.	FOOT VALVE SIZE	CTN QTY
19-VL3	\$ 2.37	3"	1 1/2"	1
19-VL312	2.58	3 1/2"		1
19-VL4	3.38	4"		1

NOTE: Valve leathers are generally 1/2" larger than cylinder size.

Eg. 3" diameter cylinder requires 3" O.D. cup leather and 3 1/2" O.D. valve leather
 Please note that there are some exceptions

PVC EXPANSION COUPLINGS

PVC EXPANSION COUPLING - UNION STYLE


- PVC body, nut and plunger
- NBR O-rings
- Solvent weld connections
- 150 psi at 73°F



PART NO.	UPC 777808+	LIST PRICE-A	PORT (TUBE)		BODY LENGTH (L)		OUTSIDE DIA. (D1)	SOCKET I.D. (D2)	SPIGOT O.D. (D4)	CASE QTY
			IPS SIZE	I.D.	EXTENDED					
U29-EC05	313877	\$ 4.44	1/2"	0.364"	6.654"	8.688"	1.890"	0.850"	0.839"	90
U29-EC07	313884	4.85	3/4"	0.825"	7.559"	9.803"	2.126"	1.063"	1.043"	60
U29-EC10	313891	6.11	1"	1.064"	8.700"	11.378"	2.600"	1.327"	1.307"	40
U29-EC12	313907	11.18	1 1/4"	1.390"	9.763"	12.520"	2.992"	1.673"	1.654"	30
U29-EC15	313914	12.24	1 1/2"	1.630"	9.882"	12.874"	3.228"	1.913"	1.890"	20
U29-EC20	313924	17.73	2"	2.075"	11.300"	14.370"	3.701"	2.390"	2.370"	16
29-EC25		26.61	2.5"	2.50"	12.622"	16.870"	4.224"	2.889"	2.875"	4
29-EC30		35.08	3"	3.00"	13.465"	17.579"	4.957"	3.516"	3.50"	3
29-EC40		58.58	4"	4.00"	14.795"	19.331"	6.146"	4.518"	4.50"	2

NOTE: Cold water applications. Not recommended for hot water applications.

PVC COMPRESSION FITTINGS



PVC COUPLINGS - IRON & PVC PIPE SIZE

Nitrile Seal

Rated @ 150 PSI @ 73°F(23°C)

PART NO.	UPC 777808+	LIST PRICE-A	IPS SIZE	BODY LENGTH	OUTSIDE DIAMETER	CASE WGT-lbs	CASE QTY
U29-CC05	313788	\$ 1.97	1/2"	5.236"	1.850"	27.2	100
U29-CC07	313785	2.26	3/4"	5.315"	2.086"	31.3	90
U29-CC10	313792	2.89	1"	5.748"	2.402"	29.3	60
U29-CC12	313808	3.22	1 1/4"	6.299"	2.874"	26.2	40
U29-CC15	313815	4.28	1 1/2"	6.890"	3.150"	26.5	30
U29-CC20	313822	5.77	2"	7.874"	3.622"	24.8	20
U29-CC25	313839	14.72	2 1/2"	9.921"	4.528"	22.7	10
U29-CC30	313846	22.02	3"	10.866"	5.276"	12.9	4
U29-CC40	313853	29.44	4"	11.929"	6.339"	9.9	2
U29-CC60	313860	53.34	6"	11.220"	8.780"	15.7	2

NOTE: Not recommended for use on systems exceeding 100 PSI at 120°F (48°C)

NOTE: Pipes must be properly restrained or end blocked to prevent blow off after installation.

Pricing subject to change. Please confirm pricing with your Sales Rep.